

P&S

PASS & SEYMOUR INC.

ESTABLISHED 1890



PORCELAIN
and **ELECTRICAL**
SUPPLIES



Main Office and Works
SOLVAY STATION, SYRACUSE N.Y. U.S.A.

Digitized by:



Association for Preservation Technology, International

Building Technology Heritage Library

<https://archive.org/details/buildingtechnologyheritagelibrary>

All Devices Listed Conform to the NATIONAL ELECTRICAL CODE STANDARD unless Otherwise Specified

P&S

REG. U.S. PAT. OFF.

PORCELAIN and ELECTRICAL SUPPLIES

THE FOLLOWING TRADE NAMES APPEARING THROUGHOUT CATALOG
NO. 29 ARE REGISTERED IN THE UNITED STATES PATENT OFFICE

FLUTO

ALABAX

Ghurlok

PASSMOUR

*The List Prices and all Quotations applying to this catalog are subject to change
without notice. The Shipping Weights in this catalog are not guaranteed, as they
are approximate and subject to change without notice.*

*Merchandise should not be returned to us unless permission in writing has been given
by this company.*

CATALOG No. 29, 1929

MANUFACTURED BY

PASS & SEYMOUR, INC.

ESTABLISHED 1890

MAIN OFFICE AND WORKS

Solvay Station

Syracuse, N. Y.

U. S. A.

BRANCH OFFICES

NEW YORK: 71-73 Murray Street

CHICAGO: 730-32 W. Monroe Street

SALES REPRESENTATIVES

NEW ENGLAND

ALVA D. STEIN

156 Purchase Street, Boston, Mass.

WEST COAST

C. R. BACH COMPANY

252 Fifth Street, San Francisco, Calif.

DENVER

F. E. STAIBLE, INC.

2356 Blake Street, Denver, Colo.

EXPORT DEPARTMENT, SOLVAY STATION, Syracuse, New York, U. S. A.

CABLE ADDRESS: "Passmour Syracuse"

P & S MAKE LABOR LESS



THE SOCKET THAT LOCKS


ALL SHURLOK DEVICES ARE PATENTED

The illustrations of the brass and porcelain key sockets show how P & S SHURLOK Sockets prevent the loss of lamps. The special screw can be operated only with P & S 1299 Key.

P & S 1299 Keys for use with all SHURLOK devices are supplied only when ordered. The price is 35 cents each net, regardless of quantity.

Uno Shade-Holders listed on page 35 can be used with all brass shell SHURLOK devices.

Special shade-holders for porcelain and weatherproof sockets are listed in this catalog on page 35.




No. 100421

Shurlok

Shurlok A Patented Feature SHURLOK is not an Attachment—it is a P & S Patented Feature built into Brass Shell, Porcelain and Molded Composition Lamp Sockets that will effectually prevent the illicit removal of lamps.

The Lock at Work A special hardened Screw, with a rigid sleeve bearing—when operated by a SHURLOK KEY—locks the metal base of the Lamp in the socket.

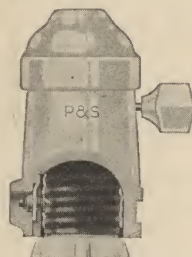

No. 61317

Shurlok

The Key—P & S 1299 The SHURLOK KEY is the only tool that will operate the SHURLOK LOCK SCREW. SHURLOK KEYS are only supplied on order—as the effectiveness of SHURLOK increases in proportion to the care exercised in the distribution of SHURLOK KEYS.

Shurlok Devices Throughout the Catalog The word SHURLOK is added to the Trade Number of each device that is made with the lamp lock feature. SHURLOK is part of the Trade Number—remember this when ordering.

Assortment with Regular Sockets SHURLOK Sockets, in unbroken cartons, may be assorted—with regular sockets of the same Catalog Number Type—to make Standard Package Quantity as of regular sockets.

ADVANTAGES OF SHURLOK DEVICES

Hotels and Apartments Prevents the breakage of lamps by careless removal and handling. Prevents the use of high wattage lamps and appliances, without the knowledge of the proprietors. Insures that lamps which illuminate danger signals, fire exits and dark stairways will not be removed. Prevents lamps being taken as souvenirs by the thoughtless visitor.

Mills, Factories and Mines Prevents the taking of lamps that are within easy reach. The majority of lamps are taken because it is easy to do so. Proper illumination prevents the ruin of valuable dies through the misplacing of the parts to be formed by the die. Guards the illumination necessary for employees to work successfully. Prevents the exchange of lamps during the absence of employees. Prevents unjust suspicion of employees when lamps are missed. Reduces damage and compensation litigation because accidents are prevented. Insures against accident, because illumination enables us to see dangers.

Railways Prevents the loosening and falling of lamps due to excessive vibration in moving vehicles, subways, elevated lines and on station platforms.



No. 540

Shurlok



No. 1299

P
A
S
S
&
S
E
Y
M
O
U
R

I
N
G

P & S Fluto Brass Shell Interchangeable Parts

Bodies—Bases—Caps

Each style of parts is packed in separate cartons. The parts quickly fit the corresponding member of the device when assembled.

They are economical to stock and practical to use. P & S Brass Shell Key Sockets can be supplied with high heat resisting keys at an advance in list price of 1 cent each.

P & S Fluto Brass Shell Assembled Sockets

Key and Pull Chain, 250 Watts, 250 Volts
Keyless, 660 Watts, 250 Volts



No. 100421



No. 59482



No. 90

The popular numbers for special requirements demanding assembled devices are shown below.

Cat. No.	Parts Nos.	Description	Wt., Lbs. Std. Pkg.	Price Each
100421	CA-S19	1/8-inch Cap Key Body...	50	\$.36
*100421	CA-S19	1/8-inch Cap Key Body...	50	.36
Brown Key	CL-S19	Pendant Cap Key Body...	50	.36
100425	CA-S21	1/8-Inch Cap Keyless Body.....	45	.33
59482	CA-S21	1/8-Inch Cap Keyless Body.....	45	.33
90	CA-S22	1/8-Inch Cap Pull Chain Body.....	50	.50

*Brown key is part of the catalog number; remember this when ordering.

P & S Fluto Brass Shell Shurlok Assembled Sockets

Key and Pull Chain, 250 Watts, 250 Volts
Keyless, 660 Watts, 250 Volts



No. 100421 Shurlok



No. 59482 Shurlok



No. 90 Shurlok

Carton quantity, 25; standard package, 100.

Cat. No.	Parts Nos.	Description	Wt., Lbs. Std. Pkg.	Price Each
100421 Shurlok	CA-S29	1/8-Inch Cap Key Body	22	\$.63
59482 Shurlok	CA-S31	1/8-Inch Cap Keyless Body.....	21	.60
90 Shurlok	CA-S32	1/8-Inch Cap Pull Chain Body.....	22	.77


No. 1228 P & S Fluto Brass Shell Sockets with Attachment Plug Bases

250 Watts, 250 Volts



This device is made up of BO Fluto brass shell base and S-22 pull socket body. The base is fitted with wires for connecting to the terminals of Fluto bodies.

Cat. No.	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1228	2	10	8	\$.70




P & S Fluto Brass Shell Interchangeable Key Socket Bodies

Cat. No.	Watts	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
S-19	250	25	250	45	\$.26
S-20	660	25	250	45	.29

P & S Fluto Brass Shell Shurlok Interchangeable Key Socket Bodies

Cat. No.	Watts	Carton	Std. Pkg.	Wt., Lbs. S.d. Pkg.	Price Each
S-29	250	25	100	19	\$.53
S-30	660	25	100	19	.56



P & S Fluto Brass Shell Interchangeable Keyless Socket Bodies

Cat. No.	Watts	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
S-21	660	25	250	36	\$.23

P & S Fluto Brass Shell Shurlok Interchangeable Keyless Socket Bodies

Cat. No.	Watts	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
S-31	660	25	100	17	\$.50



P & S Fluto Brass Shell Interchangeable Pull Socket Bodies

Cat. No.	Watts	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
S-22	250	25	250	45	\$.40
S-65	660	25	250	45	.59



P & S Fluto Brass Shell Shurlok Interchangeable Pull Socket Bodies

Cat. No.	Watts	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
S-32	250	25	100	19	\$.67
S-75	660	25	100	19	.86



P & S Fluto Brass Shell Interchangeable Switch Bodies

Wall Type

3 Amperes, 125 Volts
1 Ampere, 250 Volts

Cat. No.	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
S-17	10	20	5	\$.53



P & S Fluto Brass Shell Interchangeable Switch Bodies Ceiling Type

3 Amperes, 125 Volts
1 Ampere, 250 Volts

Cat. No.	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
S-23	10	20	7	\$.53



P & S Fluto Brass Shell Interchangeable Switch Bodies
3 Amps., 125 Volts; 1 Amp., 250 Volts

Rosette Type

Cat. No.	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
S-24	10	20	7	\$.53

Rosette Shell

Cat. No.	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
S-25	10	20	3	\$.13



P & S Fluto Brass Shell Interchangeable Switch Bodies

Fixture Type
3 Amperes, 125 Volts
1 Ampere, 250 Volts

Cat. No.	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
S-37	10	20	10	\$.68



No. 1261 P & S Wrenches

For Fluto and Flutolier Sockets

This wrench is invaluable for husk work.



Cat. No.	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1261	1	1	1	\$.50

P & S Fluto Brass Shell Interchangeable Caps

Straight Nipple

Cat. No.	Size Inches	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
CA	1/8	25	250	12	\$.10
CB	1/4	25	100	7	.16
CC	3/8	25	100	7	.16
CN	1/2	25	50	5	.49



P & S Fluto Brass Shell Interchangeable Caps

Male Thread

Cat. No.	Size Inches	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
CO	1/8	25	100	7	\$.10
CD	3/8	25	50	3	.16



P & S Fluto Brass Shell Interchangeable Caps

90-Degree Angle

Cat. No.	Size Inches	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
CG	1/8	25	50	3	\$.21
CH	1/4	5	25	2	.25
CI	3/8	5	25	2	.24



P & S Fluto Brass Shell Interchangeable Caps

Angle Fixture

Cat. No.	Size Inches	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
CJ	1/8	25	50	5	\$.27
CK	1/4	25	50	6	.28



P & S Fluto Brass Shell Interchangeable Caps

Pendent Caps with Bushing—Composition

Cat. No.	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
CL	25	250	9	\$.10



P & S Fluto Brass Shell Interchangeable Caps

Pendent Caps with Bushing—Porcelain

This is a pendent cap with a strain relief feature.



Cat. No.	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
CM	25	100	12	\$.10

P & S Fluto Brass Shell Interchangeable Caps

Pendent Cap with Cord Grip
3/8 to 1/2-Inch Cord

The cord grip relieves the terminals of strain and protects the cord from injury.

Cat. No.	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
CR	25	100	10	\$.15



P & S Fluto Brass Shell Interchangeable Caps

Side Outlet



Cat. No.	Size Inches	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
CX	1/8	25	100	7	\$.12

P & S Fluto Porcelain Interchangeable Cleat Bases

Holes for supporting screws are spaced 2 1/8 inches on centers. Outside dimensions of base, 3 1/8 x 2 3/4 inches.

Cat. No.	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
BA	10	100	32	\$.23



P & S Fluto Porcelain Interchangeable Round Slotted Bases

Holes for supporting screws are spaced 1 1/8 inches on centers. Outside diameter of base is 2 1/16 inches.



Cat. No.	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
BB	10	100	19	\$.18

P & S Fluto Porcelain Interchangeable Round Concealed Bases


Holes for supporting screws are spaced 1 1/8 inches on centers. Outside diameter is 2 1/16 inches.

Cat. No.	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
BC	10	100	19	\$.18



P & S Fluto Porcelain Interchangeable Large Concealed Bases

Holes for supporting screws are spaced 2 3/16 inches on centers. Recess in base is 1/2 inch deep, 1 7/8 inches wide. Outside diameter of base, 2 5/8 inches.




Cat. No.	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
BD	10	100	25	\$.23

P & S Fluto Porcelain Interchangeable Angle Wall Bases

Holes for supporting screws are spaced 1 1/8 inches on centers. Dimensions of base on diameters, 2 3/8 x 2 1/16 inches.

Cat. No.	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
BE	10	100	25	\$.23



P
A
S
S
&
S
E
Y
M
O
U
R

I
N
C

P & S Fluto Porcelain Interchangeable Molding Bases




Holes for supporting screws are spaced $2\frac{3}{32}$ inches on centers. Outside dimensions of base $2\frac{3}{4} \times 2$ inches.

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
BF	10	100	20	\$.18

P & S Fluto Brass Shell Interchangeable Covered Bases

Holes for supporting screws are spaced $1\frac{3}{4}$ inches on centers. Outside diameter of base, $2\frac{1}{4}$ inches.

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
BJ	10	100	23	\$.28



P & S Fluto Brass Shell Interchangeable Covered Bases



No. BK

BK.—Holes for supporting screws are spaced $2\frac{3}{4}$ inches on centers. Outside diameter of base, $3\frac{1}{2}$ inches.

BM.—Holes for supporting screws are spaced $2\frac{3}{4}$ inches on centers, and $3\frac{1}{2}$ inches on centers (2 sets of screw holes). Outside diameter of base, $4\frac{1}{32}$ inches.

Cat. No.	Size Box Inches	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
BK	$3\frac{1}{4}$	10	50	30	\$.37
BM	4	10	50	40	.67

P & S Fluto Brass Shell Interchangeable Box Bases



No. BL

BL.—Holes for supporting screws are spaced $2\frac{3}{4}$ and $2\frac{5}{16}$ inches on centers (2 sets of screw holes). Outside diameter of base, $3\frac{21}{32}$ inches.

BN.—Holes for supporting screws are spaced $2\frac{3}{4}$ inches on centers, and $3\frac{1}{2}$ inches on centers (2 sets of screw holes). Outside diameter of base, $4\frac{21}{32}$ inches.

Cat. No.	Size Box Inches	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
BL	$3\frac{1}{4}$	10	50	30	\$.37
BN	4	10	50	50	.67

P & S Fluto Brass Shell Interchangeable Attachment Plug Bases



Fluto Attachment Plug Base is fitted with wires for connecting to the terminals of Fluto bodies.

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
BO	10	50	7	\$.27

P & S Fluto Brass Shell Interchangeable All Metal Bases



No. BU, Complete with Stud Cap and Screw



These devices can be readily installed on any grounded system, and will give a permanently grounded installation that conforms to all Underwriters' requirements.

Fitted with horizontal supporting

bridge, with 1-inch clearance above wall surface.

BR and BU will cover either $3\frac{1}{4}$ or 4-inch boxes.

BT will cover $3\frac{1}{4}$ -inch boxes only.

BR is installed on any type outlet box by means of straps, Nos. 1162, 1163, 1164 and 1165 (shown on another page) if studs or ears are present in the box. BU and BT are installed on any type outlet box by means of the stud cap and screw. A center hole is provided for the screw stem of the BU or BT base and makes an excellent installation.

Cat. No.	Outside Diam., In.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
BR	$4\frac{21}{32}$	10	50	28	\$.60
BR and 1164	$4\frac{21}{32}$	10	50	29	.67
BU } With Stud Cap	$4\frac{21}{32}$	10	50	29	.67
BT } and Screw	$3\frac{13}{16}$	5	60	30	.55

P & S Flutolier Brass Shell Assembled Sockets

Push and Keyless, 660 Watts, 250 Volts
Pull Chain, 250 Watts, 250 Volts



No. 7035



No. 7001



No. 7006

These brass fibre lined shells, threaded for shade-holders, are not interchangeable with Fluto sockets, being smaller. They are especially adaptable for husk and socket-cover work.

Standard finish is brush brass.

Standard length of key is $\frac{7}{8}$ -inch; of chains, 8 inches.

The popular numbers for special requirements demanding assembled devices are shown below.

Carton quantity, 25; standard package, 250.

Cat. No.	Parts Nos.	Description	Wt., Lbs. Std. Pkg.	Price Each
7001	FA-S35	$\frac{1}{8}$ -Inch Cap Keyless Body.....	33	\$.33
7006	FA-S36	$\frac{1}{8}$ -Inch Cap Pull Chain Body.....	40	.50
7035	FA-S34	$\frac{1}{8}$ -Inch Cap Push Body.....	40	.36
7053	FX-S34	$\frac{1}{8}$ -Inch Side Outlet Cap Push Body	40	.38

P & S Flutolier Interchangeable Push Socket Bodies

660 Watts

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
S-34	25	250	35	\$.26



P & S Flutolier Interchangeable Push Socket Bodies

With Removable Buttons

660 Watts



Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
S-34 Special	25	250	35	\$.33

P & S Flutolier Interchangeable Keyless Socket Bodies



Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
S-35	25	250	24	\$.23

660 Watts

P & S Flutolier Interchangeable Pull Socket Bodies

250 Watts

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
S-36	25	250	35	\$.40



P & S Flutolier Brass Shell Interchangeable Caps

Straight Nipple



Cat. No.	Size Inches	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
FA	1/8	25	250	10	\$.10
FB	1/4	25	100	7	.16
FC	3/8	25	100	6	.16

P & S Flutolier Brass Shell Interchangeable Caps

90 Degree Angle

Cat. No.	Size Inches	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
FF	1/8	25	100	7	\$.21
FH	3/8	25	25	2	.24



P & S Flutolier Brass Shell Interchangeable Caps

Pendant Bushing—Composition



Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
FK	25	250	8	\$.10

P & S Flutolier Brass Shell Interchangeable Caps

Side Outlet

Cat. No.	Size Inches	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
FX	1/8	25	100	6	\$.12



P & S Intermediate Base Assembled Brass Shell Sockets

No. 6090 Pull Chain Sockets

75 Watts, 125 Volts

Has 1/8-inch cap.



Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
6090	25	100	10	\$.84

No. 6421 Key Sockets

75 Watts, 125 Volts

Has 1/8-inch cap.

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
6421	25	100	10	\$.36



No. 6482 Keyless Sockets

75 Watts, 250 Volts

Has 1/8-inch cap.




Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
6482	25	100	9	\$.33


P & S Porcelain Assembled Sockets

Key, 250 Watts, 250 Volts

Keyless, 660 Watts, 250 Volts



No. 61317



No. 61227



No. 61327

The popular numbers for special requirements demanding assembled devices are shown below.

The standard finish of brass caps and brass chain for porcelain sockets is nickel flash, but brush brass can be supplied on special order.

Carton quantity, 10; standard package, 100.


Cat. No.	Parts Nos.	Description	Wt., Lbs. Std. Pkg.	Price Each
61317	PA-S26	Pendant Cap Key Body.....	35	\$.36
60317	PA-S27	Pendant Cap Keyless Body.....	30	.33
61227	PC-S26	1/8-Inch Cap Key Body.....	36	.46
60227	PC-S27	1/8-Inch Cap Keyless Body.....	30	.43
61327	PE-S26	3/8-Inch Cap Key Body.....	36	.50
60327	PE-S27	3/8-Inch Cap Keyless Body.....	30	.47

P & S Porcelain Interchangeable Key Socket Bodies

Cat. No.	Watts	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
S-26	250	10	100	28	\$.26



P & S Porcelain Shurlok Interchangeable Key Socket Bodies



Cat. No.	Watts	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
S-38	250	10	100	30	\$.53

ALABAX

Porcelain Lighting Fixtures
are Shown on Pages
19 to 30 Inclusive

P & S Porcelain Interchangeable Keyless Socket Bodies



Cat. No.	Watts	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
S-27	660	10	100	18	\$.23

P & S Porcelain Shurlok Interchangeable Keyless Socket Bodies



Cat. No.	Watts	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
S-39	660	10	100	20	\$.50

P & S Porcelain Interchangeable Pull Socket Bodies



Brass Pendant

No.	Watts	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
S-47	250	10	100	30	\$.59
S-66	660	10	100	30	.81

Porcelain Pendant

No.	Watts	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
S-4700	250	10	100	31	\$.59
S-6600	660	10	100	36	.81

P & S Porcelain Shurlok Interchangeable Pull Socket Bodies

Brass Pendant

Cat. No.	Watts	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
S-57 Shurlok	250	10	100	35	\$.86



Porcelain Pendant

Cat. No.	Watts	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
S-5700 Shurlok	250	10	100	31	\$.86

No. S-57 Shurlok

P & S Porcelain Interchangeable Caps

Pendant for Reinforced Cord




Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
PA	10	100	12	\$.10

P & S Porcelain Interchangeable Caps

Pendant for Lamp Cord

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
PB	10	100	12	\$.10



P & S Porcelain Interchangeable Caps

Straight Nipple—Brass



Cat. No.	Size In.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
PC	1/8	10	100	15	\$.20
PD	1/4	10	100	15	.30
PE	3/8	10	100	16	.24
PZ	1/2	10	100	23	.27

No. PC

P & S Porcelain Interchangeable Caps

Straight Nipple—Aluminum



Cat. No.	Size In.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
PF	3/8	10	100	16	\$.40
PG	1/2	10	100	14	.42

P & S Porcelain Interchangeable Caps

90-Degree Angle—Brass

Cat. No.	Size In.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
PO	3/8	10	100	28	\$.50
PU	1/2	10	100	30	.60



P & S Porcelain Interchangeable Caps

90-Degree Angle—Aluminum



Cat. No.	Size In.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
PQ	3/8	10	100	28	\$.65
PR	1/2	10	100	25	.75

P & S Porcelain Interchangeable Parts

Pendent Porcelain Cap with Cord Grip

For 1/2-Inch Cord

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
PY	10	100	28	\$.20



P & S Porcelain Interchangeable Caps

1/2-Inch Nipple for Pipe

3/4-Inch Hexagonal Left-Hand Lock Nut



Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
PW	10	100	32	\$.32

P & S Porcelain Interchangeable Closed Bases

Holes for supporting screws are spaced 1 1/16 inches on centers. Outside diameter of base, 2 inches.


Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
PH	10	100	15	\$.12



P & S Porcelain Interchangeable Cleat Bases

Holes for supporting screws are spaced 1 inch diagonally on centers. Outside dimensions of base, 3 1/8 x 2 inches.


Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
PI	10	100	28	\$.14



P & S Porcelain Interchangeable Molding Bases

Holes for supporting screws are spaced 2 3/32 inches on centers. Outside dimensions of base, 2 3/4 x 1 21/32 inches.

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
PK	10	100	30	\$.20



P & S Porcelain Interchangeable Concealed Bases



Holes for supporting screws are spaced $2\frac{1}{4}$ inches on centers. Outside diameter of base, $2\frac{1}{2}$ inches. Recess in base, $\frac{1}{2}$ inch deep and $1\frac{1}{8}$ inches wide.

Cat. No.	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
PL	10	100	30	\$.15

P & S Porcelain Interchangeable Box Bases

PM.—Holes for supporting screws are spaced $2\frac{3}{4}$ inches on centers. Outside diameter of base, $3\frac{1}{2}$ inches.


PN.—Holes for supporting screws are spaced $3\frac{1}{2}$ inches on centers. Outside diameter of base, $4\frac{1}{2}$ inches.



No. PN

Cat. No.	Size Box Inches	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
PM	$3\frac{1}{4}$	10	50	30	\$.30
PN	4	10	50	42	.40

P & S Porcelain Shurlok Sockets and No. 1245 Shade Holder




The illustration shows how P & S Shurlok Sockets prevent the loss of lamps. The special screw can be operated only with P & S No. 1299 Key.

P & S No. 1299 Keys for use with all Shurlok devices are supplied only when ordered.

The price is 35 cents each net regardless of quantity.

P & S No. 1245 Shade Holders can be used with all porcelain Shurlok devices.



P & S Husk Sockets

With Body Terminals

660 Watts, 250 Volts

The shoulder of the nipple is wide and it holds the socket rigid, prevents vibration and makes a tight assembly of the lighting unit.

A special wrench for inserting the socket cap in husks is No. 1277.



Cat. No.	Cap Inches	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
856	$\frac{1}{8}$	10	100	30	\$.35
857	$\frac{1}{4}$	10	100	30	.35
858	$\frac{3}{8}$	10	100	30	.35
861	$\frac{1}{2}$	10	100	30	.35


Wrench

1277	..	1	1	..	\$.50
------	----	---	---	----	-------

No. 877 P & S Porcelain Angle Sockets

With Body Terminals

Useful in show window, show case lighting and other installations where a small angle socket is desired.



Cat. No.	Cap Inches	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
877	$\frac{3}{8}$	10	100	38	\$.54

P & S Porcelain Husk or Fixture Sockets

660 Watts, 250 Volts



Keyless, porcelain with $\frac{1}{8}$, $\frac{1}{4}$ and $\frac{3}{8}$ -inch brass caps.

The special wrench for inserting the socket cap in husks is No. 1260.

Brass finish for cap will be furnished unless otherwise specified.

Cat. No.	Cap. In.	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
831	$\frac{1}{8}$	10	100	30	\$.43
854	$\frac{1}{4}$	10	100	31	.47
843	$\frac{3}{8}$	10	100	31	.47


P & S Chain Pull Candle Fixture Sockets

With Fiber Cover


250 Watts, 250 Volts



No. 1215



No. 4120



No. 4230

Designed to eliminate awkward and difficult wiring in a limited space, as the wires are brought through the fixture arms and thence directly to the terminals on the outside of the socket body. These sockets are of standard diameter.

Cat. No.	Nipple Inches	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1215	$\frac{1}{8}$	10	100	18	\$.75
4120	$\frac{1}{8}$	10	100	18	.75
4230	$\frac{1}{8}$	10	100	18	.75

P & S Keyless Candle Sockets

With Fiber Cover

660 Watts, 250 Volts



No. 198



No. 4004



No. 4005

These sockets are standard Edison base. They are of standard diameter.



No. 4007

Cat. No.	Nipple Inches	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
198	$\frac{1}{8}$	25	250	25	\$.16
4004	$\frac{1}{8}$	25	250	30	.16
4005	$\frac{1}{8}$	25	250	25	.16

With Adjustable Hickey

Cat. No.	Adjustable Inches	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
4007	$3\frac{7}{8}$ to $5\frac{1}{2}$	25	250	33	\$.17
4008	$3\frac{15}{16}$ to $5\frac{3}{8}$	25	250	44	.17



No. 4008

P
A
S
S
&
S
E
Y
M
O
U
R

I
N

P & S Chain Pull Candle Fixture Sockets

With Fibre Cover

250 Watts, 250 Volts



No. 4192



No. 4191



No. 4190

These sockets are designed to give particularly rigid construction.

The standard chain is No. 3 size, and the standard finish is brush brass, but nickel will be furnished without extra charge.

The illustration of the No. 4190 Socket does not show the fibre cover which is furnished the same as shown on Nos. 4191 and 4192.

Cat. No.	Nipple Inches	Length Over All Inches	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
4192	1/8	3 3/16	10	100	18	\$.75
4191	1/8	3 7/8	10	100	20	.75

With Adjustable Hickey

The hickey is adjustable from 4 to 5 1/16 inches over all.

4190	1/8	...	10	100	21	\$.75
------	-----	-----	----	-----	----	--------

P & S Extension or Candle Length Sockets

With Enameled Cover



Length over all is 4 9/16 inches. Interior is supported by a rigid hickey or leg which gives ample room for free wiring. This socket may be used in candles or tubing measuring not less than 1 1/4 inches inside diameter. The fibre casing having a highly finished white glazed enamel surface allows the socket to be used without candles or tubing if desired.

Keyless Sockets

660 Watts, 250 Volts

Cat. No.	Nipple Inches	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1900	1/8	10	50	10	\$.50

Pull Sockets

250 Watts, 250 Volts

1901	1/8	10	50	14	\$.90
------	-----	----	----	----	--------

No. 6001 P & S Intermediate Base Medium to Intermediate Adapters

75 Watts, 250 Volts

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
6001	25	100	6	\$.10



P & S Porcelain Candelabra Adapters

75 Watts, 250 Volts



An adapter to convert a medium base to a candelabra base.

Designed for use with candle sockets and candelabra base lamps.

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1262	25	100	10	\$.15

P & S Intermediate Base Candle Fixture Sockets

No. 6215 Pull Candle Sockets

75 Watts, 125 Volts

Length over all, 2 11/16 inches.

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
6215	25	100	14	\$.75



No. 6215 Pull

No. 6198 Keyless Candle Sockets

75 Watts, 250 Volts

Length over all, 3 1/2 to 4 15/16 inches.

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
6198	25	100	13	\$.17



No. 6198 Keyless

P & S Candelabra Base Candle Sockets

75 Watts, 125 Volts

Female Thread

With 1/8-Inch Female Thread Nipple

Outside diameter of porcelain body is 3/4 inch.

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
347	50	100	5	\$.21




Male Thread

With 1/16-Inch Male Thread

27 Threads per Inch

Outside diameter of porcelain body is 3/4 inch.

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
328	50	100	5	\$.21



P & S Candelabra Base Candle Sockets

75 Watts, 125 Volts

With 1/8-Inch Nipple and Hickey

Designed for use on fixtures equipped with glass candles.

Outside diameter of porcelain body is 3/4 inch.

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
327	50	100	5	\$.21



P & S Bayonet Shell Receptacles

660 Watts, 250 Volts

A brass fibre-lined shell, threaded for Uno shadeholders, is firmly secured to porcelain base by two screws. Terminal is located at a convenient angle and provision is made for large service wire.



No. 50717



No. 108

Brush brass is standard finish.

Diameter of base, 2 inches; height over all—No. 50717, 1 7/8 inches; No. 108, 2 inches.

Holes for supporting screws are on 1 1/4-inch centers.

Cat. No.	Description	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
50717	Concealed Base..	10	100	20	\$.25
108	Slotted Base....	10	100	20	.25

P & S Brass-Covered Outlet Receptacles

For 3 1/4-Inch Outlet Boxes

660 Watts, 250 Volts



No. 1009

Brass fibre-lined shell, threaded for Uno shade holder.

Brush brass is standard finish and will be furnished unless otherwise specified.

Diameter of base, 3 1/2 inches; height over all, 1 1/2 inches. Holes for supporting screws are spaced on 2 3/4-inch centers.

With Terminals

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1009	10	50	32	\$.45

*With 6-Inch No. 14 Rubber-Covered Wires

*85 10 50 36 \$.50
*Furnished with longer No. 14 rubber-covered wire leads at an advance of 4 1/2 cents per foot, each conductor.

P & S Brass-Covered Outlet Receptacles

For 3 1/4 and 4-Inch Outlet Boxes

660 Watts, 250 Volts

Brass fibre-lined shell, threaded for Uno shade holder.

Brush brass is standard finish and will be furnished unless otherwise specified.

Diameter of base, 4 1/2 inches; height over all, 1 1/2 inches. Holes for supporting screws are spaced on 2 3/4 and 3 1/2-inch centers.



No. 1010

With Terminals

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1010	10	50	48	\$.60

*With 6-Inch No. 14 Rubber-Covered Wires

*78 10 50 50 \$.65
*Furnished with longer No. 14 rubber-covered wire leads at an advance of 4 1/2 cents per foot, each conductor.

No. 428 P & S Brass-Covered Outlet Receptacles

For 3 1/4 and 4-Inch Outlet Boxes

250 Watts, 250 Volts



Brass fibre-lined shell, threaded for Uno shade holder.

Brush brass is standard finish and will be furnished unless otherwise specified.

Diameter of base, 4 1/2 inches; height over all, 2 1/4 inches.

Holes for supporting screws are spaced on 2 3/4 and 3 1/2-inch centers.

Furnished with short chain and 6 feet of linen cord and ball.

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
428	10	50	66	\$1.30

No. 1410 P & S Brass Sub-Bases

For Outlet Boxes



The sub-base adapter is designed for use with 4-inch box lase receptacles and rosettes where the outlet boxes are not flush with the surface of the wall or where the outlet boxes are tilted.

The sub-base adapter carries the receptacle or rosette base 1 inch from the wall. It is held in place by a circular lip which surrounds the devices.

Standard finish is brush brass.


Cat. No.	For Box Base Inches	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1410	4	10	20	7	\$.35

P & S Porcelain 2-Piece Receptacles

For Outlet Boxes and Ceiling Plates

Open or Concealed Wiring

660 Watts, 600 Volts



P&S

Slotted holes for supporting screws are spaced 1 1/2 inches on centers.

Outside diameter, 1 7/8 inches across flats; 2 1/8 inches across corners.

Height of receptacle, 1 1/2 inches.

The collar is threaded on the metal lamp shell and it cannot become loose nor will it turn from vibration or jar.

The base is slotted for open and concealed wiring.

P & S Nos. 1160 and 1161 may be used with No. 598.

Without Shade-Holder Groove

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
598	10	100	28	\$.25

With Shade-Holder Groove

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
599	10	100	28	\$.30

P & S Porcelain 2-Piece Receptacles

For Outlet Boxes and Ceiling Plates

Open or Concealed Wiring

660 Watts, 600 Volts

Slotted holes for supporting screws are spaced 1 1/2 inches on centers.

Outside diameter, 2 5/16 inches.

The collar is held in place by a spring ratchet.

Ample wiring room is provided.

Heavy terminals.



P&S

Without Shade-Holder Groove

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
698	10	100	30	\$.25

With Shade-Holder Groove

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
699	10	100	30	\$.30

P & S Porcelain Concealed Receptacles

For Outlet Boxes and Ceiling Plates

660 Watts, 600 Volts

Holes for supporting screws are spaced 1 3/4 inches on centers.

Outside diameter of base, 2 5/16 inches.

Height of receptacle, 1 15/16 inches.

The base is cupped 5/32 inch.

Ample wiring room and rugged terminals.

Base is secured to the outside shell by twin screws in the lamp base.



P&S

Without Shade-Holder Groove

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
4000	10	100	30	\$.25

With Shade-Holder Groove

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
4001	10	100	30	\$.30

P & S Porcelain Concealed Receptacles

For Conduit Fittings

660 Watts, 600 Volts

Slotted holes for supporting screws are spaced 1 3/8 inches on centers. Outside diameter of base, 2 1/8 inches.

Height of receptacle, 2 inches.

The body is secured to the base by a center retaining screw and when the body is separated from the base the terminals are exposed for wiring



P&S

Without Shade-Holder Groove

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
451	10	100	36	\$.25

With Shade-Holder Groove

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
88259	10	100	36	\$.30

Shade-holder groove is 1 5/8 inches in diameter.

P
A
S
S
&
S
E
Y
M
O
U
R

I
N
C.

P & S Weatherproof Outlet Box Receptacles

With Removable Metal Cover

660 Watts, 600 Volts



Japanned iron cover.

Height, $1\frac{1}{16}$ inches. Outside diameter of cover, $3\frac{1}{16}$ inches. Holes for supporting screws are spaced $2\frac{3}{4}$ inches on centers.

Longer wires furnished to order at $4\frac{1}{2}$ cents per foot each conductor.

For $\frac{3}{4}$ -Inch Outlet Boxes

Cat. No.	Description	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
442	6-Inch Wires	10	100	60	\$.35
456	Screw Terminals	10	100	51	.30

P & S Porcelain Cleat Receptacles

With Concealed Terminals

660 Watts, 600 Volts

For use with decorative lighting. Designed to mount on the sharp corner of a building or structure.

Base is $3\frac{1}{4} \times 1\frac{1}{16}$ inches. Height, $2\frac{3}{8}$ inches. Supporting screws are spaced $1\frac{3}{4}$ inches on centers.

Wires are carried 1 inch from surface, $2\frac{1}{2}$ inches apart.



Without Groove

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
61971	10	100	55	\$.28

P & S Porcelain Cleat Receptacles

With Concealed Terminals

660 Watts, 250 Volts



Base is $3\frac{1}{4} \times 1\frac{1}{16}$ inches. Height, $1\frac{5}{8}$ inches. Supporting screws are spaced $1\frac{3}{4}$ inches on centers.

Without Groove

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
64369	10	100	43	\$.28


With Shade-Holder Groove

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
66612	10	100	43	\$.33

P & S Porcelain Concealed Receptacles

For Wood Moulding or Conduit Fittings

660 Watts, 250 Volts



Base is $2\frac{3}{4} \times 1\frac{1}{8}$ inches. Height, 2 inches. Supporting screws are spaced $2\frac{3}{32}$ inches on centers.

Without Groove

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
61770	10	100	35	\$.30

With Shade-Holder Groove

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
61670	10	100	35	\$.35

P & S Weatherproof Outlet Box Receptacles

With Removable Metal Cover

660 Watts, 600 Volts



Japanned iron cover. With a pivot for quick removal.

Height, $1\frac{1}{16}$ inches. Outside diameter of cover, $4\frac{1}{16}$ inches. Holes for supporting screws are spaced $3\frac{1}{2}$ inches on centers.

Longer wires furnished to order at $4\frac{1}{2}$ cents per foot each conductor.

For 4-Inch Outlet Boxes

Cat. No.	Description	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
443	6-Inch Wires	5	100	75	\$.40
457	Screw Terminals	5	100	72	.35

P & S Porcelain Outlet Receptacles

With Flush Back

660 Watts, 250 Volts



These receptacles are easy to wire and are built for long severe service.

For $\frac{3}{4}$ -Inch Outlet Boxes

Height, $1\frac{1}{8}$ inches. Outside diameter, $3\frac{1}{2}$ inches. Holes for supporting screws are spaced $2\frac{3}{4}$ inches on centers.

Cat. No.	Description	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
41	With Shade-Holder Groove	10	100	60	\$.40

For 4-Inch Outlet Boxes

Height, $1\frac{3}{32}$ inches. Outside diameter, $4\frac{1}{2}$ inches. Holes for supporting screws are spaced $3\frac{1}{2}$ inches on centers.

Cat. No.	Description	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
110	With Shade-Holder Groove	10	50	43	\$.50

P & S Porcelain Weatherproof Outlet Box Receptacles

660 Watts, 600 Volts



Weatherproof highly glazed finish. With 6-inch No. 14 stranded rubber covered wires. Longer wires to order at $4\frac{1}{2}$ cents per foot each conductor.

For $\frac{3}{4}$ -Inch Outlet Boxes

Height, $1\frac{1}{8}$ inches. Outside diameter, $3\frac{1}{2}$ inches. Holes for supporting screws are spaced $2\frac{3}{4}$ inches on centers.

Cat. No.	Description	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
40	With Groove	10	100	76	\$.50

For 4-Inch Outlet Boxes

Height, $1\frac{1}{8}$ inches. Outside diameter, $4\frac{1}{2}$ inches. Holes for supporting screws are spaced $3\frac{1}{2}$ inches on centers.

Cat. No.	Description	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
122	With Groove	10	50	56	\$.60

No. 60020 P & S Bayonet Shell Receptacles

With Medium Brass-Covered Base

660 Watts, 250 Volts

A brass fibre-lined shell, threaded for Uno shade-holders, is firmly secured to a brass-covered porcelain base by two screws. Terminal is located at a convenient angle and provision is made for large service wire.

Brushed brass is standard finish.

Diameter of base, $3\frac{5}{16}$ inches; height over all, $2\frac{1}{4}$ inches; holes for supporting screws are on $1\frac{1}{8}$ and 2-inch centers.



Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
60020	10	100	62	\$.60

P & S Porcelain Cleat Receptacles
For Electric Signs and Damp Places
660 Watts, 600 Volts



Provided with square recess for stove bolts in the base.
Base is $2\frac{1}{16} \times 2\frac{1}{16}$ inches. Height, $1\frac{1}{16}$ inches. Holes for supporting bolts or screws are spaced $1\frac{1}{16}$ inches, on centers.

Without Groove

Cat. No.	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
62358	10	100	34	\$.25

P & S Porcelain Cleat Receptacles

With Brass Shell for Shade-Holder
660 Watts, 250 Volts



Base is $2\frac{5}{16} \times 2\frac{1}{16}$ inches. Height, $1\frac{1}{16}$ inches. Supporting screws are spaced $2\frac{3}{8}$ inches on centers.

Cat. No.	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
9403	10	100	33	\$.27

P & S Porcelain Cleat Receptacles

For Heavy Duty
660 Watts, 250 Volts



Base is $2\frac{5}{16} \times 2\frac{1}{16}$ inches. Height, $1\frac{1}{8}$ inches. Supporting screws are spaced $2\frac{3}{8}$ inches on centers.

Without Groove

Cat. No.	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
9402	10	100	35	\$.17

With Shade-Holder Groove

Cat. No.	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
4013	10	100	35	\$.22

P & S Porcelain Cleat Receptacles

For Signs and Surface Wiring
660 Watts, 250 Volts



Known to the trade as a Pony receptacle.
Diameter of base, $2\frac{1}{2}$ inches. Height, $1\frac{1}{8}$ inches. Screw holes are spaced $1\frac{1}{16}$ inches.

With Screw Terminals

Cat. No.	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
50715	10	100	25	\$.12

With Loop Terminals

Cat. No.	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
50716	10	100	25	\$.12

No. 6715 P & S Intermediate Base Porcelain Cleat Receptacles

For Signs and Surface Wiring
75 Watts, 250 Volts

Diameter, $1\frac{1}{8}$ inches. Hole spacing, $1\frac{1}{2}$ inches.

Cat. No.	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
6715	25	100	17	\$.12



P & S Porcelain Cleat Receptacles
With Single Center Supporting Screw



660 Watts, 250 Volts


Diameter of base, $1\frac{15}{16}$ inches.
Height, $1\frac{1}{8}$ inches.

Without Groove

Cat. No.	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
*9171	10	100	27	\$.12

*Not N. E. C. Standard.

P & S Mogul Porcelain Screw Ring Receptacles



No. 424

1500 Watts, 600 Volts

Diameter of hole required, $2\frac{1}{16}$ inches.

Especially adapted to commercial units, stage lighting, theatre spot lights, and projectors.



No. 425

Cat. No.	Description	Length Back Inches	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
424	Exposed Terminals	$\frac{5}{16}$	10	100	72	\$.80
425	Enclosed Terminals	$1\frac{1}{16}$	10	100	81	.90

No. 418 P & S Mogul Porcelain Receptacles

For Conduit Box and Sign Work

1500 Watts, 600 Volts


Especially adapted to stage lighting.

Punch required is $2\frac{3}{16}$ inches in diameter.

Supporting screws are spaced $2\frac{3}{4}$ inches on centers.


Special spring center contact prevents loosening of lamps.

Cat. No.	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
418	1	100	70	\$.85



P & S Mogul Porcelain Receptacles

1500 Watts, 600 Volts




Base is $3\frac{1}{2} \times 3\frac{1}{2}$ inches. Height, $2\frac{1}{16}$ inches. Supporting screws are spaced $2\frac{1}{16}$ inches on centers.

Lamp grip is furnished as standard equipment. Very rugged construction. Desirable for all types of installation.

Cat. No.	Description	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
520	Without Groove	10	50	35	\$.75

P & S Mogul Porcelain Receptacles

For Battery Charging Apparatus



Cat. No.	Description	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
†417	Less Collar	10	50	25	\$.60

†Not approved for general wiring.

P
A
S
S
&
S
E
Y
M
O
U
R

I
N
C



P & S Mogul Porcelain Receptacles

Open or Concealed Base
1500 Watts, 600 Volts

Diameter of base, 2 $\frac{5}{8}$ inches. Supporting screws are spaced 2 inches on centers.

Cat. No.	Description	Carton	Std. Pkg.	Wt., Lbs.	Price Each
516	With Collar	10	50	38	\$.78

P & S Mogul Brass Interchangeable Keyless Sockets

1500 Watts, 600 Volts

Bodies for Mogul Caps MA and MB Only


These sockets are lined with H. T. Elastoid fiber which is approved for use with gas-filled lamps of above 100-watt capacity.

Cat. No.	Carton	Std. Pkg.	Wt., Lbs.	Price Each
S50	10	50	25	\$.85



Caps For No. S50 Socket Bodies

Cat. No.	Size Inches	Carton	Std. Pkg.	Wt., Lbs.	Price Each
MA	$\frac{3}{4}$	10	50	12	\$.65
MB	$\frac{1}{2}$	10	50	12	.65



P & S Lamp Grips

General Information

APPLICATION.—Lamp Grips are not required on Shurlok devices but are needed where the porcelain lamp sockets or receptacles are subject to vibration or other influences that cause lamps to back out of the devices.

DESCRIPTION.—A tempered bronze spring recessed in the lamp shell presents a curved surface to the lamp base and prevents accidental turning of the lamp.

SPECIAL ASSORTMENT.—Devices of the same catalogue number with and without Lamp Grips may be assorted in unbroken cartons to make standard package quantities.

Lamp Grips are recommended as practical for use on the following devices:



Medium Base Socket with Lamp Grip in Place

Pull and Key Bodies: Standard type only, in porcelain medium base.

Reflector Socket Bodies: Standard only.

Mogul Base Bodies: Porcelain only, except those with ring collar. Standard equipment.

Husk or Fixture Sockets: Porcelain type.

Aluminum Shell Sockets: All types.

Outlet Box Receptacles: Metal shade holder types and all weatherproof receptacles.

Porcelain Weatherproof Sockets Standard.

Porcelain Receptacles: Cleat and concealed terminal types.

Sign Receptacles: Medium base only, without porcelain rings.

P & S Lamp Grips are furnished on a wide variety of Mogul and medium base devices at an addition to the list price of the device.


Price, Add to List Price of the Device.....each \$.05



Mogul Base Socket with Lamp Grip in Place

P & S Mogul Porcelain Interchangeable 2-Piece Socket Bodies

1500 Watts, 600 Volts



The Mogul Porcelain Bodies are fitted with lamp grip as standard equipment.

Height, 3 $\frac{1}{4}$ inches. Diameter, 2 $\frac{5}{8}$ inches.

Screws are spaced 1 $\frac{1}{2}$ inches on centers.

Cat. No.	Carton	Std. Pkg.	Wt., Lbs.	Price Each
S53	10	50	35	\$.70


P & S Mogul Porcelain Interchangeable 1-Piece Socket Bodies

1500 Watts, 600 Volts

Fitted with lamp grip as standard equipment.

Height, 2 $\frac{1}{2}$ inches. Diameter, 2 $\frac{5}{8}$ inches. Screws are spaced 1 $\frac{1}{2}$ inches on centers.

Cat. No.	Carton	Std. Pkg.	Wt., Lbs.	Price Each
S54	10	50	35	\$.55



P & S Mogul Porcelain Interchangeable Socket Bodies

With 15-Inch Slow Burning Triple Braid
No. 14 Wires

1500 Watts, 600 Volts



The Mogul Porcelain Bodies are fitted with lamp grip as standard equipment.

Height, 2 $\frac{1}{2}$ inches. Diameter, 2 $\frac{5}{8}$ inches. Screws are spaced 1 $\frac{1}{2}$ inches on centers.

Cat. No.	Carton	Std. Pkg.	Wt., Lbs.	Price Each
S56	10	50	50	\$.70

P & S Interchangeable Metal Caps

For Porcelain Mogul Bodies

Cat. No.	Size Inches	Carton	Std. Pkg.	Wt., Lbs.	Price Each
MC	$\frac{3}{8}$	10	50	10	\$.30
MD	$\frac{1}{2}$	10	50	16	.30
ME	$\frac{3}{4}$	10	50	16	.30



P & S Interchangeable Brass Lock Nut Caps

For Porcelain Mogul Bodies

With $\frac{3}{4}$ -Inch Male Thread and Lock Nut for Shades or Fixture Fittings



Cat. No.	Size Inches	Carton	Std. Pkg.	Wt., Lbs.	Price Each
MF	$\frac{1}{2}$	10	50	16	\$.40

P & S Interchangeable Metal Yokes

For Porcelain Mogul Bodies

Cat. No.	Size Inches	Carton	Std. Pkg.	Wt., Lbs.	Price Each
MG	$\frac{3}{8}$	10	50	17	\$.15
MH	$\frac{1}{2}$	10	50	17	.15
MI	$\frac{3}{4}$	10	50	17	.15



P & S Anti-Paint Plugs



Anti-Paint Plug
in No. 5403
Sign Receptacle

Anti-Paint Plugs protect the contact shell cavity during the construction and painting of the sign. Slivers of metal and paint cannot lodge against the current carrying parts. Plugs are easily removed by piercing them with a sharp instrument or blade.

Optional equipment without charge on the following normal Edison base sign receptacles—one-piece: Nos. 54, 5400, 5401, 5403, 5404 and 61777—two-piece; Nos. 427, 439, 4003, 4035, 4109, 4132, 59108, 59427, 61988, 102704. When the plug is desired, specify "With Anti-Paint Plugs."

Standard equipment without charge on Nos. 6054, 6403 and 6878 intermediate base sign receptacles. If desired without anti-paint plugs, the fact should be specified on the order.


P & S Spring Stud Receptacles

With Bronze Washer Head Spring Stud and Screw

660 Watts, 600 Volts

The spring stud has a washer head $\frac{25}{64}$ inch in diameter. A heavy coil spring makes the stud self-adjusting for varying thickness of metal. The receptacle snaps into place; run one screw in from the front.

Punch required, $1\frac{3}{8}$ inches. Stud to screw centers, $1\frac{1}{16}$ inches. Length of back, $1\frac{1}{16}$ inches. Wires carried $1\frac{1}{4}$ inches from surface.



No. 5403

With Screw Terminals

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
5403	25	250	60	\$.17

With Loop Terminals


5404	25	250	60	\$.17
------	----	-----	----	--------

P & S One-Piece Porcelain Receptacles

For Metal Signs, Lighting Units and Outlet Boxes

With Bronze Washer Head Screws

660 Watts, 600 Volts



No. 54



No. 5401

Punch required for above receptacles, $1\frac{3}{8}$ inches. Supporting screws are spaced $1\frac{1}{16}$ inches on centers. Length of back, $1\frac{1}{16}$ inches. Exposed screws are bronze.

With Screw Terminals

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
54	25	250	25	\$.17

With Loop Terminals

5400	25	250	25	\$.17
------	----	-----	----	--------

With Cupped Back and Screw Terminals

5401	25	250	25	\$.17
------	----	-----	----	--------

P & S Porcelain Receptacles

For Stage Work, Metal Signs and Outlet Boxes

660 Watts, 600 Volts



Punch required for this receptacle is $1\frac{3}{8}$ inches in diameter.

Holes for supporting screws are spaced $1\frac{1}{16}$ inches on centers.

Length of back, $1\frac{1}{16}$ inches.

Wires carried from surface 1 inch.

No. 61777 is used extensively by manufacturers of stage lighting equipment for foot lights, border lights and various other purposes.

Furnished complete with bronze screws.

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
61777	25	100	25	\$.18

P & S Porcelain Sign Receptacles

With 1-Inch Skirt—For Wood Signs


660 Watts, 250 Volts

Not N. C. E. Standard.

The hole required for this receptacle is $1\frac{1}{2}$ inches in diameter.

Holes for supporting screws are spaced $1\frac{1}{16}$ inches on center.


Length of back $\frac{1}{2}$ inch, on which wires are carried.



Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
61072	25	100	21	\$.17

P & S Porcelain Receptacles

For Metal Signs and Outlet Boxes



Punch required $1\frac{3}{8}$ inches in diameter. Holes for supporting screws are spaced $1\frac{1}{16}$ inches on centers. Length of back, $1\frac{1}{16}$ inches. Wires carried 1 inch from surface.

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
61977	25	100	21	\$.18

P & S Intermediate Base One-Piece Porcelain Receptacles

For Metal Signs, Decorative Lighting, Etc.

75 Watts, 125 Volts

No. 6403 Spring Stud Receptacles

Has spring stud and screw. Hole spacing, $1\frac{3}{8}$ inches. Hole required, 1 inch.



Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
6403	25	100	16	\$.17

No. 6054 Receptacles

Has two screws. Hole spacing, $1\frac{3}{8}$ inches. Hole required, 1 inch.

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
6054	25	100	16	\$.17



P & S Porcelain Candelabra Sign Receptacles

Approved for indoor use only, for metal signs. Diameter punch required, $\frac{25}{32}$ inch. Holes for supporting screws, spaced $1\frac{1}{16}$ inches on centers. Length of back, $\frac{5}{16}$ inch. Wires carried from surface, $\frac{1}{16}$ inch. Furnished complete with bronze screws.



Cat. No.	Watts	Volts	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
778	75	125	25	100	10	\$.18

P
A
S
S
&
S
E
Y
M
O
U
R

I
N
C

P
A
S
S
&
S
E
Y
M
O
U
R
.
I
N
C

P & S Porcelain Sign Receptacles

For Metal Signs—Candelabra Base

75 Watts, 125 Volts

Approved for indoor use only.

Punch required for this receptacle is $\frac{25}{32}$ inch in diameter.

Holes for supporting screws are spaced $1\frac{1}{16}$ inches on centers.

Length of back, $\frac{5}{16}$ inch.

Wires carried from surface, $1\frac{1}{16}$ inch.

Furnished complete with bronze screws.

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
677	25	100	10	\$.18

P & S Porcelain Screw Ring Receptacles

For Signs, Fixtures and Outlet Boxes

660 Watts, 600 Volts

Punch required, $1\frac{1}{2}$ inches in diameter. Wires carried from surface, 1 inch.

With Screw Terminals				
Cat. No.	Length Back Inches	Car-ton	Std. Pkg.	Price Each
61988	$1\frac{1}{8}$	25	100	\$.20
With Loop Terminals				
439	$1\frac{1}{8}$	25	100	\$.20
With Screw Terminals Enclosed				
102704	$1\frac{1}{8}$	25	100	\$.25

P & S Porcelain Screw Ring Receptacles

For Signs, Fixtures and Outlet Boxes

660 Watts, 250 Volts

Punch required, $1\frac{1}{2}$ inches in diameter. Length, $1\frac{1}{16}$ inches with button; without button, $\frac{13}{16}$ inch. Wires carried from surface, $\frac{5}{8}$ inch.

With Screw Terminals				
Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
59108	25	100	20	\$.20
With Loop Terminals				
4132	25	100	20	\$.20
With Screw Terminals Enclosed				
4109	25	100	25	\$.25
With Cupped Back, Screw Terminals				
59427	25	100	20	\$.20

P & S Porcelain Screw Ring Receptacles

For Signs, Fixtures and Outlet Boxes

660 Watts, 600 Volts

Punch required, $1\frac{1}{2}$ inches in diameter. Length, $1\frac{1}{16}$ inches. Wire carried from surface, $1\frac{1}{16}$ inches.

With Screw Terminals				
Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
427	25	100	25	\$.20

P & S Porcelain Screw Ring Receptacles

For Signs, Fixtures and Outlet Boxes

660 Watts, 250 Volts

Grooved ring for shade-holders. Punch required, $1\frac{1}{2}$ inches in diameter. Length of back, $\frac{13}{16}$ inch. Wires carried from surface, $\frac{5}{8}$ inch.

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
4036	25	100	24	\$.25

P & S Porcelain Screw Ring Receptacles

For Signs, Fixtures and Outlet Boxes

660 Watts, 600 Volts

With 6-inch stranded No. 14 rubber covered wires.

Punch required, $1\frac{1}{2}$ inches. Length of back, $\frac{7}{8}$ inch.

For longer wires furnished to order, add $4\frac{1}{2}$ cents list per foot each conductor.

Devices with wires can be supplied with slow burning wires on order.



Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
4003	10	100	30	\$.28

Porcelain Screw Rings for Receptacles

Nos. 59108, 4132, 4109, 59427 and 4003

61990	10	100	..	\$.06
-------	----	-----	----	--------

P & S Porcelain Screw Ring Receptacles

For Signs, Fixtures and Outlet Boxes

660 Watts, 600 Volts

Punch required, $1\frac{1}{2}$ inches in diameter.

Length of back, 1 inch.

With 6-inch stranded No. 14 rubber covered wires.

For longer wires furnished to order, add $4\frac{1}{2}$ cents list per foot each conductor.

Devices with wires can be supplied with slow burning wires on order.



Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
4035	10	100	30	\$.28

Porcelain Screw Rings for Receptacles

Nos. 427, 61988, 439, 102704 and 4035

61989	10	100	..	\$.06
-------	----	-----	----	--------

P & S Porcelain Screw Ring Receptacles

For Signs, Fixtures and Outlet Boxes

660 Watts, 600 Volts

Grooved ring for shade holders.

Punch required, $1\frac{1}{2}$ inches. Length of back, $\frac{7}{8}$ inch.

With 6-inch stranded No. 14 rubber covered wire.

For longer wires furnished to order, add $4\frac{1}{2}$ cents list per foot each conductor.

Devices with wires can be supplied with slow burning wires on order.



Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
4037	10	100	28	\$.33
61991 Ring	10	100	...	\$.10

No. 6878 P & S Intermediate Base Porcelain Screw Ring Receptacles

For Metal Signs, Decorative Lighting Etc.

75 Watts, 250 Volts

Has removable ring.

Hole required, $1\frac{1}{16}$ inches.

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
6878	25	100	20	\$.20



P & S Porcelain Sign Receptacles

For Metal Signs—Candelabra Base

75 Watts, 125 Volts

Approved for indoor use only.

Punch required, $\frac{25}{32}$ inch in diameter. Length of back, $\frac{5}{16}$ inch. Wires, $\frac{3}{4}$ inch from surface.

Porcelain ring and gasket.



Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
878	25	100	10	\$.20

P & S Wrenches



For Porcelain Ring Type Sign Receptacles

Cat. No.	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1140	1	1	1	\$.50

For Intermediate Base Porcelain Ring Type Sign Receptacles

1279	1	1	1	\$.50
------	---	---	---	-------

No. 1260 P & S Wrenches

For Porcelain Fixture Sockets

For use when installing P & S porcelain fixture sockets and P & S porcelain fixture receptacles like P & S 4103 and 4135.

Cat. No.	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1260	1	1	1	\$.50



No. 1197 P & S Ring Receptacle Pliers



For use when installing standard ring receptacles in signs or lighting units. The lug formed by pliers in the metal sign face or the supporting collar of the lighting unit, engages a notch in the body and prevents turning or rotating of the receptacle.

Cat. No.	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1197	1	1	1	\$1.50

P & S Porcelain Screw Ring Receptacles


For Shallow Ceiling Pans or Spinnings

660 Watts, 250 Volts

Two-way corner slots permit the wires to swing to the side or back for close assembly.

Punch required is 1½ inches in diameter.

Length of back, ⅝-inch.




Cat. No.	Description	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
4103	With Slow Burning Wires, Non-Weatherproof.....	10	100	25	\$.28
4203	With Rubber-Covered Wires....	10	100	25	.28
61993	Ring.....	10	100	..	.06

P & S Porcelain Screw Ring Receptacles

For Shallow Ceiling Pans or Spinnings

660 Watts, 250 Volts



Two-way corner slots permit the wires to swing to the side or back for close assembly.

Punch required is 1½ inches in diameter.

Length of back, 1 inch.

Cat. No.	Description	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
4135	With Slow Burning Wires, Non-Weatherproof.....	10	100	25	\$.28
4235	With Rubber-Covered Wires....	10	100	25	.28
61994	Ring.....	10	100	..	.06

P & S Porcelain Screw Ring Receptacles

With Embossed Ring, 2⅝ Inches Wide, ¾ Inch High For Lighting Fixtures, Ceiling Pans and Spinnings

660 Watts, 250 Volts

Punch required is 1½ inches in diameter.

Length of back is 1⅜ inch.

The embossed ring may also be furnished on the following receptacles: 4132, 59427, 4109, 4003, 4103 and 4203.

Add the net for the proper quantity of the embossed ring to the net price for the corresponding quantity of the desired receptacle.



No. 4014

Cat. No.	Description	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
4014	Complete Device, Screw Terminal..	10	100	35	\$.30
4023	Glazed Ring Only.....	25	250	45	.07
4024	Unglazed Ring Only.....	25	250	45	.06

P & S Diple Connector Sockets



No. 1359 Normal Edison Base



Showing Separable Plug Wired Below Chain and Body of Socket Installed in Fixture Hanger



No. 1360 Mogul Base

This device consists of a socket body, separable plug and fixture hook. When the body is installed the polarity lugs and hook protrude from the top of the fixture holder. Separable plug is wired to the circuit just below the last link of the chain. Unit is hung by passing flat hook through a slot in connector body and hooking to fixture chain. Connector is then pressed onto lugs on body of socket, completing the circuit.

Simplifies and reduces cost of maintenance of commercial lighting equipment. Cleaning globes and changing the lamps of fixtures which are equipped with this socket, is less troublesome. There need be no interruption in lighting during these operations. An extra unit can replace the one being cleaned or re-lamped.

The rating of the separable plug is: 10 amperes, 250 volts; 15 amperes, 125 volts.

Cat. No.	Description	Rating Watts	Volts	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1359	Normal Edison Base	660	250	10	100	35	\$.75
1360	Mogul Base.....	..	..	10	100	80	.95

No. 7047 P & S Armored Fixture Sockets

Keyless With Wires

660 Watts, 250 Volts

Cat. No.	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
7047	100	500	60	\$.15



No. 7109 P & S Armored Fixture Sockets

Keyless without Wires

650 Watts, 250 Volts

The shell has the regular Uno shadeholder thread, which is conveniently used for assembling in ceiling pans, etc. Height over all, 1⅞ inches. Furnished in clean finish only.



Cat. No.	Carton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
7109	25	250	25	\$.15

P
A
S
S
&
S
E
Y
M
O
U
R

I
N
C

P & S Porcelain Pull Receptacles

For Lighting Fixtures

250 Watts, 250 Volts



These receptacles are fitted with porcelain clamping rings and gaskets, and are for use with units having 1½-inch throat.

Cat. No.	Description	Car-ton	Std. Pkg.	Wt. Lbs.	Price Each
994	Insulated Chain, Cord.....	10	100	40	\$.91
995	8-Inch Chain.....	10	100	40	.75
996	Cord Only.....	10	100	40	.75
997	8-Inch Insulated Chain.....	10	100	40	.83
998	Short Chain, Cord.....	10	100	40	.83
999	3-Foot Chain.....	10	100	40	.98
61992	Skirted Ring.....	100			.08
99700	8-Inch Insulated Chain, Pendant.	10	100	41	.83

P & S Brass Shell Pull Chain Sockets

For Ceiling Lights

250 Watts, 250 Volts

Standard finish of socket shell is clean finish. Brush brass chain, black cord and ball are standard. No charge for nickel finish chain, white cord and ball.



No. 7998

Cat. No.	Description	Car-ton	Std. Pkg.	Wt. Lbs.	Price Each
7994	8-Inch No. 6 Insulated Chain, 42-Inch Cord.....	25	100	21	\$.60
7995	8-Inch No. 6 Chain.....	25	100	21	.45
7996	50-Inch Cord.....	25	100	21	.45
7997	8-Inch No. 6 Insulated Chain..	25	100	21	.55
7998	8-Inch No. 6 Chain, 42-Inch Cord.	25	100	21	.55
7999	36-Inch No. 3 Chain.....	25	100	21	.65

P & S Brass Shell Pull Chain Sockets

For Ceiling Lights

250 Watts, 250 Volts



No. 3998

The clamping collar threads on the Uno Bead and holds the socket rigidly in the fixture.

Standard finish of socket shell is clean finish. Standard finish of chain is brush brass. No charge for nickel finish.

Cat. No.	Description	Car-ton	Std. Pkg.	Wt. Lbs.	Price Each
3994	8-Inch No. 6 Insulated Chain, 42-Inch Cord.....	25	250	62	\$.75
3995	8-Inch No. 6 Chain.....	25	250	62	.60
3996	50-Inch Cord.....	25	250	62	.60
3997	8-Inch No. 6 Insulated Chain..	25	250	62	.70
3998	8-Inch No. 6 Chain, 42-Inch Cord..	25	250	62	.70
3999	36-Inch No. 3 Chain.....	25	250	62	.80
1278	Assembly Wrench.....	1	1	1	.50

P & S Brass Shell Pull Chain Sockets

With Adjustable Adapter For Lighting Fixtures

250 Watts, 250 Volts

An easy adjustment is possible with the use of the adapter, which installs on a ¾-inch fixture stud.

Standard finish of socket shell is clean finish. Standard finish of chain is brush brass. No charge for nickel finish.



No. 3998WAA

Cat. No.	Description	Car-ton	Std. Pkg.	Wt. Lbs.	Price Each
3994WAA	8-Inch No. 6 Insulated Chain, 42-Inch Cord.....	10	100	30	\$.85
3995WAA	8-Inch No. 6 Chain.....	10	100	30	.70
3996WAA	50-Inch Cord.....	10	100	30	.70
3997WAA	8-Inch No. 6 Insulated Chain	10	100	30	.80
3998WAA	8-Inch No. 6 Chain, 42-Inch Cord.	10	100	30	.80
3999WAA	36-Inch No. 3 Chain.....	10	100	30	.90

P & S Porcelain Pull Receptacles

These devices are neat in appearance. They are easy to wire and install, and are made of genuine P & S porcelain.

For ¾-Inch Boxes Only



No. 4010

These receptacles are regularly equipped with 8 inches of chain, nickel finish, with an insulator and pendant. They can also be supplied with short chain, long cord and ball for ceiling application, without additional charge.

Diameter of base, 3½ inches; height over all, 1½ inches.

Holes for supporting screws are spaced on 2¾-inch centers.

Without Shade-Holder Groove

Cat. No.	Description	Watts	Car-ton	Std. Pkg.	Wt. Lbs.	Price Each
4010	8-Inch Insulated Nickel	250	10	50	33	\$.50
4027	Chain.....	660	10	50	33	.78

With Shade-Holder Groove

4026	8-Inch Insulated Nickel	250	10	50	33	\$.50
4032	Chain.....	660	10	50	33	.78

When similar device is desired in keyless, order P & S No. 41, listed on page 11.

With Deep Recessed Back

For ¾ and 4-Inch Boxes

Designed with a deep recessed back to simplify installation when boxes are tilted or projecting from the wall.

All of the following catalog numbers are regularly supplied with the shade-holder groove ring and with short chain, long cord and ball. They may also be supplied with the plain ring and 8-inch chain, nickel finish with an insulator and pendant, for use as a wall bracket without additional charge.



No. 4012

Receptacles for ¾-inch boxes: Diameter of base, 4 inches; height over all, 2 inches. Holes for supporting screws spaced on 2¾-inch centers.

Receptacles for 4-inch boxes: Diameter of base, 4¾ inches; height over all, 2 inches. Holes for supporting screws spaced on 3½-inch centers.

For Mounting on Boxes with Ears

Provided with screws for direct mounting on outlet boxes with ears.

Cat. No.	Watts	Description	Size Box In.	Car-ton	Std. Pkg.	Wt. Lbs.	Price Each
4011	250	Short Chain, Long	3¼	10	50	40	\$.50
4028	660	Cord and Ball...	3¼	10	50	40	.68
4058	660	Keyless.....	3¼	10	50	39	.32
4012	250	Short Chain, Long	4	10	50	40	.50
4029	660	Cord and Ball...	4	10	50	40	.78
4057	660	Keyless.....	4	10	50	39	.42


For Mounting on Stud Boxes, Etc.

Provided with steel mounting strap, washer head screws and ¾-inch lock nut, the following catalog numbers are easily and quickly installed on stud boxes.

4021	250	Short Chain, Long	3¼	10	50	48	\$.57
4030	660	Cord and Ball...	3¼	10	50	48	.75
4060	660	Keyless.....	3¼	10	50	47	.39
4022	250	Short Chain, Long	4	10	50	48	.57
4031	660	Cord and Ball...	4	10	50	48	.85
4059	660	Keyless.....	4	10	50	47	.49

P & S Medium Base Porcelain 2-Piece Reflector Socket Bodies

Standard Body 660 Watts, 600 Volts
Shurlok Body 660 Watts, 250 Volts

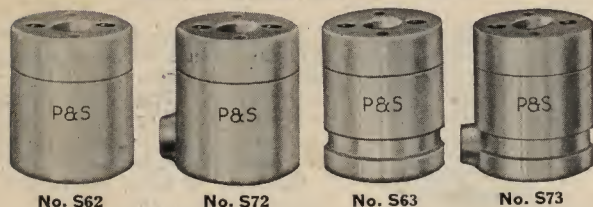

Standard bodies are fitted with lamp grip as standard equipment. Length of bodies, $2\frac{1}{4}$ inches. Diameter, $1\frac{3}{4}$ inches. Screws are spaced $1\frac{1}{16}$ inches on centers. Supporting screws are supplied with each body.

Without Shade-Holder Groove

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
S62	10	100	36	\$.35
S72 Shurlok	10	100	48	.62

With Shade-Holder Groove

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
S63	10	100	36	\$.40
S73 Shurlok	10	100	48	.67

P & S Interchangeable Metal Caps

For Reflector Socket Bodies

Cat. No.	Size In.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
No. RA	$\frac{3}{8}$	10	100	30	\$.20
RB	$\frac{1}{2}$	10	100	25	.20

No. 8137 P & S Keyless Aluminum Shell Sockets

With Cord Grip for Use with $\frac{1}{4}$ to $\frac{1}{2}$ -Inch Cord

660 Watts, 600 Volts

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
8137	10	50	15	\$.40

P & S Keyless Aluminum Shell Sockets

One-Piece Body

660 Watts, 600 Volts

Cat. No.	Size In.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
8138	$\frac{3}{8}$	10	50	15	\$.40
8139	$\frac{1}{2}$	10	50	15	.40

P & S Keyless Aluminum Shell Sockets

Aluminum Bayonet Type Shell

660 Watts, 600 Volts

The terminals are easily reached when the body is seated in the cap.

Cat. No.	Cap. Inches	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
486	$\frac{3}{8}$	10	50	15	\$.50
487	$\frac{1}{2}$	10	50	18	.50

P & S Keyless Aluminum Shell Sockets

Aluminum Sleeve Type Shell

660 Watts, 600 Volts

Cat. No.	Cap. Inches	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
486-B	$\frac{3}{8}$	10	50	18	\$.50
487-B	$\frac{1}{2}$	10	50	18	.50

P & S Aluminum Shade-Holders

For Nos. 486-B and 487-B Aluminum Sockets



No. 1247



No. 1248

The shade-holders are gripped firmly between the shell and the bead on the porcelain body of Nos. 486-B and 487-B.

Cat. No.	Size In.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price per 100
1247	$2\frac{1}{4}$	10	50	3	\$20.00
1248	$3\frac{1}{4}$	10	50	4	30.00

No. 1170 P & S Brass Socket Loops



Has threaded shank $\frac{1}{4}$ inch long and $\frac{1}{8}$ -inch male thread.

For other than brass finish add 2 cents list each.

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1170	50	100	5	\$.11

No. 1171 P & S Brass Fixture Loops

Has $\frac{1}{8}$ -inch threaded shank $\frac{5}{16}$ inch long complete with hexagon locknut.

For other than brass finish add 2 cents list each.

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1171	50	100	6	\$.13

No. 1217 P & S Brass Fixture Loops



Fixture loop is so tapered that a wide variety of chains may be used. Size of thread, $\frac{3}{8}$ -inch male.

For other than brass finish add 2 cents list each.

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1217	50	100	13	\$.24

No. 1178 P & S Brass-Plated Iron Fixture Chain



Brush brass is regular finish. All other finishes add 10 cents to price, per foot. Cannot be supplied in special finishes in lengths greater than 3 feet. Standard unit 3 feet.

Cat. No.	Car-ton Feet	Std. Pkg. Feet	Wt., Lbs. Std. Pkg.	Price per Foot
1178	9	30	7	\$.20

No. 1506 P & S Black Composition Convenience Outlet Receptacles

10 Amperes, 250 Volts



A black composition receptacle with leads to be used for mounting in canopies, fixtures and portables where convenience outlet is desired. It has 6-inch leads of identified No. 14 stranded rubber-covered wire.

There is a slot finder in the convenience outlet, making it easy to locate the attachment plug blades.

The screw ring is removed to mount this device in the fixture, and there is a lug which is an integral part of the convenience outlet and is placed there to prevent rotation. In other words, this device is held in position by a screw ring on the body behind the canopy or the fixture.

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1506	10	50	5	\$.25

P
A
S
S

&

S
E
Y
M
O
U
R

I
N
C



P & S No. AL2846—Wall Bracket pull chain type, with convenience outlet.

P & S No. AL2872—Same as above, without convenience outlet.



P & S No. AL2852—Wall Bracket, keyless type, with convenience outlet.

P & S No. AL2864—Same as above without convenience outlet.



P & S No. AL2847—Wall Bracket pull chain type, with convenience outlet and 2 1/4-inch shade holder for glassware.

P & S No. AL2873—Same as above, without convenience outlet.



P & S No. AL2853—Wall Bracket, keyless type, with convenience outlet and 2 1/4-inch shade holder for glassware.

P & S No. AL2865—Same as above, without convenience outlet.

ALABAX Side Wall Brackets combine a beauty, convenience and durability which readily distinguishes them in their field. There is a complete line to fill every wiring need.

Brackets equipped with the pull chain feature offer the advantage of individual control even though a wall switch is used. When a wall switch is installed to operate the lights,

P & S Brackets without switching mechanism can be used conveniently.

ALABAX devices are not affected by heat, moisture, or bright sunlight. They are clean and sanitary, and may be kept spotless with little effort.

The base of these brackets is 7 1/2 inches high, and 4 inches wide. From the wall to the lamp center is 3 1/8 in.



P & S No. AL846—Wall Bracket, pull chain type, with convenience outlet.

P & S No. AL872—Same as above, without convenience outlet.



P & S No. AL852—Wall Bracket, keyless type, with convenience outlet.

P & S No. AL864—Same as above, without convenience outlet.

ALABAX Side Wall Brackets when equipped with a convenience outlet will be found very serviceable and economical. Many ALABAX fittings are equipped with this feature.

Such a fixture not only gives light but answers the demand for additional current without the cost of extra wiring. The appearance is not harmed, yet the outlet is within reach. It is always ready to operate the toaster, heater, curling iron, and many electrical appliances.

Soft shaded light is often desired in hospital wards, private rooms, breakfast nooks, bathrooms, etc., and some of the brackets are equipped with a $\frac{1}{4}$ -inch shade holder to accommodate glassware. Brackets with shade holders are furnished with or without the pull chain feature, and with or without the convenience outlet.

The base of these brackets is $7\frac{1}{2}$ inches high, and 4 inches wide. From the wall to the lamp center is about $3\frac{1}{8}$ inches.



P & S No. AL847—Wall Bracket, pull chain type, with convenience outlet and $\frac{1}{4}$ -inch holder for glassware.

P & S No. AL873—Same as above, without convenience outlet.



P & S No. AL853—Wall Bracket, keyless type, with convenience outlet and $\frac{1}{4}$ -inch shade holder for glassware.

P & S No. AL865—Same as above, without convenience outlet.

P & S ALABAX PORCELAIN LIGHTING FIXTURES



P & S No. AL844—Wall Bracket, pull chain type, with porcelain ring for exposed lamps.



P & S No. AL866—Wall Bracket, keyless type, with porcelain ring for exposed lamp.



P & S No. AL845—Wall Bracket, pull chain type, with $2\frac{1}{4}$ -inch shade holder for glassware.



P & S No. AL867—Wall Bracket, keyless type, with $2\frac{1}{4}$ -inch shade holder for glassware.


THESE ALABAX Side Wall Brackets are distinctive and add charm to their surroundings. They, like all ALABAX fittings, will not stain, rust, chip or peel. They retain their beautiful "fired-in" lustre indefinitely.

The standard white glaze finish of ALABAX fittings cannot be defaced or scratched while they are being cleaned with water and soap, or even lye products. A few brisk rubs with a damp cloth and they are as spotless as new.

The porcelain ring is designed to complete the contour of the lamp when it is used without a shade, and this feature gives to ALABAX brackets a neat finished appearance. The brackets shown on this page are not supplied with stripe decorations as shown on page 27, but can be supplied in any of the all-over colors.

The base of these brackets is $7\frac{3}{8}$ inches high, and $3\frac{3}{4}$ inches wide. From the wall to the lamp center is $3\frac{1}{8}$ in.

LAMPS AND GLASSWARE ARE NOT SUPPLIED AND ARE NOT INCLUDED IN THE TRADE NUMBER

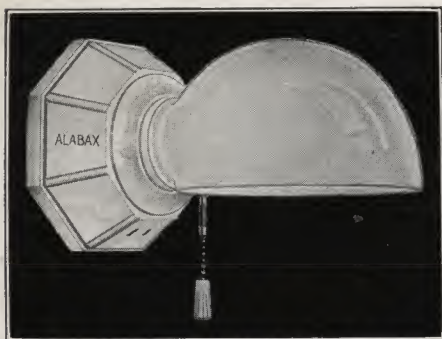

P & S No. AL923—Bracket, pull chain type, with convenience outlet.

P & S No. AL924—Same as above, without switching mechanism.



P & S No. AL990—Bracket, pull chain type with convenience outlet and 2 1/4-inch shade holder for glassware.


P & S No. AL982—Same as above, without convenience outlet.

P & S No. AL9906—Same as AL990 with 660-watt rating.

P & S No. AL9826—Same as AL982 with 660-watt rating.

THESE brackets are readily installed on all types of outlet boxes and they save delay in obtaining light. There is a deep recess in the back which insures the device going over the boxes when not flush with the surface of the wall, and they can also be mounted on a stud box when it is set flush on the surface. The pull chain types can be furnished in either 250-watt or 660-watt capacities.

The diameter of the base is 5 1/2 inches. Brackets with shade holders project from the wall 3 1/8 inches without the shade, and approximately 8 3/4 inches with the average half shade. Brackets with porcelain rings project from the wall 2 3/4 inches without the lamp and approximately 5 1/2 inches with a 25-watt lamp.

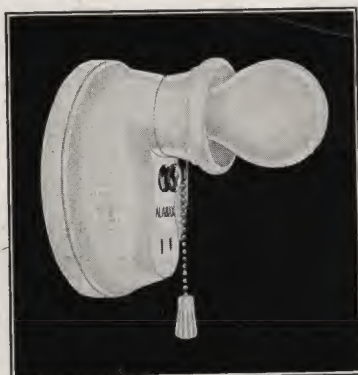


P & S No. AL989—Bracket, pull chain type, with convenience outlet.

P & S No. AL983—Same as above, without convenience outlet.


P & S No. AL9896—Same as AL989 with 660-watt rating.

P & S No. AL9836—Same as AL983 with 660-watt rating.

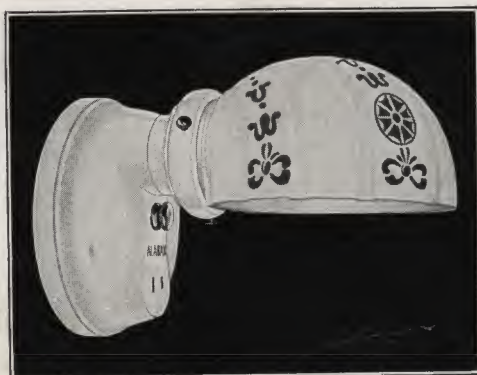

P & S No. AL980—Bracket, keyless type, with convenience outlet and 2 1/4-inch shade holder for glassware.

P & S No. AL984—Same as above, without convenience outlet.

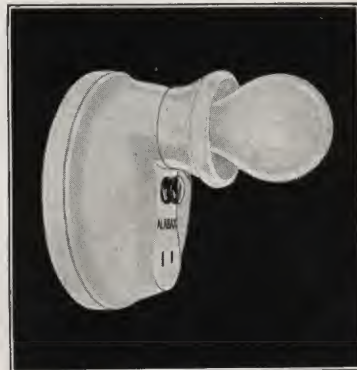

P & S No. AL981—Bracket, keyless type, with convenience outlet.

P & S No. AL985—Same as above, without convenience outlet.

THE octagonal shape of this ALABAX bracket not only improves the appearance of an installation but it has definite practical advantages. It will fit in places where the round or oval type may not fit. The bracket is neat and compact—the connection of the shade to the base is inconspicuous. Both AL923 and AL924 are equipped with a convenience outlet.

This particular bracket is exceptionally easy to install. It has been built to meet almost any condition which confronts the man who must put it up. It will fit all types of outlet boxes, when flush or extending 1/4 inch from the surface. Two wires complete the installation. The mechanism as well as the chain, is undisturbed while the wiring is being done.

The diameter of the base is 5 1/8 inches and the bracket, when equipped with a half shade extends beyond the wall about 8 inches. The projection without the shade is 3 1/8 inches.

THESE ALABAX porcelain brackets are especially desirable in many bathrooms where one outlet is installed directly over the mirror. Shaded or direct light is optional because of the shade holders for glassware and porcelain rings for exposed lamps. They are needed above the sink in kitchens, to light the work table, and in the laundry to provide for convenient illumination of laundry tubs.

In hospitals, the subdued light from these brackets with a shade, is a protection to the patient's eyes. The shades can be turned at any angle to regulate the density of the light. These brackets are suitable for use in barber shops, restaurants, and hotels as well.

LAMPS AND GLASSWARE ARE NOT SUPPLIED AND ARE NOT INCLUDED IN THE TRADE NUMBER

P & S ALABAX PORCELAIN LIGHTING FIXTURES

THIS group of ALABAX devices offers the advantage of utility as well as beauty. The base is of the same design, but the complete fitting is available with 2¼-inch, 3¼-inch and 4-inch shade holders, the selection of which is dependent upon the size of the room to be lighted and the glassware desired. They can also be supplied with a porcelain ring, in case it has been decided not to use glassware.

The porcelain shade holders or rings are made of the same porcelain as the body and will not change color or tarnish. The devices are suitable for use as ceiling and side wall fixtures in kitchens, bathrooms, bedrooms, pantries, laundries, halls, closets, breakfast nooks, nurseries, sun-rooms, garages, etc.



P & S No. AL1449—Ceiling Unit, pull chain type, with short chain and cord and 4-inch shade holder for glassware.

P & S No. AL1450—Same as above, with short insulated chain and porcelain pendant.

P & S No. AL1451—Same as above, without switching mechanism.

P & S No. AL1349—Ceiling Unit, pull chain type, with short chain and cord and 3¼-inch shade holder for glassware.

P & S No. AL1350—Same as above, with short insulated chain and porcelain pendant.

P & S No. AL1351—Same as above, without switching mechanism.



P & S No. AL875—Bracket, pull chain type exposing only the porcelain pendant—2¼-inch holder.

P & S No. AL850—Same as above, with short insulated chain and porcelain pendant.

DIMENSIONS			
CATALOG NUMBER	DIAMETER OF BASE AGAINST CEILING	DISTANCE TO BOTTOM OF SHADE HOLDER OR RING	
AL1449	4 ¹³ / ₁₆ inches	3 ¹¹ / ₁₆	inches
AL1450	4 ¹³ / ₁₆ inches	3 ¹¹ / ₁₆	inches
AL1451	4 ¹³ / ₁₆ inches	3 ¹¹ / ₁₆	inches
AL1349	4 ¹³ / ₁₆ inches	2 ⁷ / ₈	inches
AL1350	4 ¹³ / ₁₆ inches	2 ⁷ / ₈	inches
AL1351	4 ¹³ / ₁₆ inches	2 ⁷ / ₈	inches
AL 875	4 ¹³ / ₁₆ inches	2 ³ / ₄	inches
AL 849	4 ¹³ / ₁₆ inches	2 ³ / ₄	inches
AL 850	4 ¹³ / ₁₆ inches	2 ³ / ₄	inches
AL 851	4 ¹³ / ₁₆ inches	2 ³ / ₄	inches
AL 951	4 ¹³ / ₁₆ inches	2 ¹¹ / ₁₆	inches
AL 949	4 ¹³ / ₁₆ inches	2 ¹¹ / ₁₆	inches
AL 950	4 ¹³ / ₁₆ inches	2 ¹¹ / ₁₆	inches
AL 962	4 ¹³ / ₁₆ inches	2 ¹¹ / ₁₆	inches



P & S No. AL951—Ceiling Unit, without switching mechanism, with porcelain ring for exposed lamp.

P & S No. AL949—Same as above, with short chain and cord pull mechanism.

The fixture with 2¼-inch shade holder is also supplied in the pull chain type with short chain and long cord for ceiling use, known as P & S No. AL849 and without switching mechanism for both ceiling and wall use, known as P & S No. AL851.

The fixture with porcelain ring is also supplied in the pull chain type exposing only the porcelain pendant, known as P & S No. AL962, and when supplied with a short insulated chain and porcelain pendant, it is known as P & S No. AL950. Both of the latter styles are for wall bracket work.

LAMPS AND GLASSWARE ARE NOT SUPPLIED AND ARE NOT INCLUDED IN THE TRADE NUMBER



P & S No. AL1475—Ceiling Unit, without switching mechanism, with 4-inch holder for glassware.

THESE gracefully designed units are very practical and suitable for ceiling installations of all kinds. They are distinctive and the simplicity of their lines produces a very attractive fixture.

Ceiling units with the same base as P & S AL1475 and AL1200, illustrated above, are available with 2¼-inch shade

Diameter
of all bases
in this group
is 7½ inches



P & S No. AL1200—Ceiling Unit, without switching mechanism, with porcelain ring for exposed lamp.

holder for glassware known as P & S AL1201, and 3¼-inch shade holder known as P & S AL1300.

These ALABAX ceiling units are completely wired and cannot be furnished with lead wires unattached. They are only supplied without switching mechanism.



P & S No. AL1202—Ceiling unit, with porcelain ring for exposed lamp and outlet for cord.

P & S AL1202 illustrated above is the same as all other ceiling units shown on this page, except it has a hole in the side and is adaptable for use with three-conductor cord and switch combination. The illustration shows the unit equipped with P & S switch combination, which is not furnished with P & S AL1202 but is supplied separately and known as P & S Cat. No. 1551.

This type ceiling unit can also be supplied with 2¼-inch

shade holder for glassware, which is P & S AL1203; with 3¼-inch shade holder which is P & S AL1301; or with 4-inch shade holder which is P & S AL1476.

These units are very useful in kitchens to control the light and supply an outlet to operate an electrical appliance. They are convenient in offices, beauty parlors, etc., where electrical appliances and machines are used.

LAMPS AND GLASSWARE ARE NOT SUPPLIED AND ARE NOT INCLUDED IN THE TRADE NUMBER

P & S ALABAX PORCELAIN LIGHTING FIXTURES



P & S No. AL2671—Ceiling Unit, without switching mechanism, with 6-inch fitter for glassware.

P & S No. AL2669—Same as above, with pull chain feature.

Diameter of base..... $8\frac{7}{8}$ inches

Overall height of unit without glassware $3\frac{3}{4}$ inches

THESE one-piece ALABAX ceiling fixtures are completely equipped with the exception of glassware, ready for rapid installation on any type of box. The supporting screws are not exposed. They are especially desirable for hospitals, office buildings, hotels, bedrooms, kitchens, hallways, bathrooms, porches, pantries, etc.

They are supplied regularly equipped with 6-inch leads of No. 16 wire, attached.

AL2469, AL2471, AL2669 and AL2671 will be furnished on order with leads unattached, at no extra cost.

AL2371 cannot be furnished without leads.



P & S No. AL2471—Ceiling Unit, without switching mechanism, with 4-inch fitter for glassware.

P & S No. AL2469—Same as above, with pull chain feature.

Diameter of base $7\frac{1}{4}$ inches

Height of unit without glassware. $3\frac{3}{4}$ inches



P & S No. AL2371—Ceiling Unit, without switching mechanism, with $3\frac{1}{4}$ -inch fitter for glassware.

Not supplied with pull chain feature.

Diameter of base $5\frac{1}{4}$ inches

Height of unit without glassware. $2\frac{3}{4}$ inches

LAMPS AND GLASSWARE ARE NOT SUPPLIED AND ARE NOT INCLUDED IN THE TRADE NUMBER

THE ALABAX devices illustrated are very serviceable. They will install on an outlet box which is flush, behind the ceiling surface, tilted, or extending from the ceiling. They are designed to meet the majority of conditions which the wireman faces.

The shade holder may be removed from the base of the unit and the two parts may be taken down and thoroughly washed without interfering with the wiring of the unit. The part which is wired remains stationary on the outlet.



P & S No. AL1469—Ceiling Unit, pull chain type, with short chain and cord and 4-inch shade holder for glassware.

P & S No. AL1470—Same as above, with short insulated chain and porcelain pendant.


P & S No. AL1471—Same as above, without switching mechanism.



P & S No. AL369—Ceiling Unit, pull chain type, with short chain and cord, and 2 1/4-inch shade holder for glassware.

P & S No. AL870—Same as above, with short insulated chain and porcelain pendant.

P & S No. AL871—Same as above, without switching mechanism.

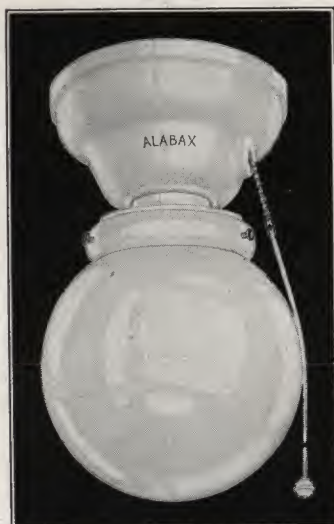

P & S No. AL1369—Ceiling Unit, pull chain type with short chain and cord, and 3 1/4-inch shade holder for glassware.

P & S No. AL1370—Same as above, with short insulated chain and porcelain pendant.

P & S No. AL1371—Same as above, without switching mechanism.

DIMENSIONS		
CATALOG NUMBER	DIAMETER OF BASE AGAINST CEILING	DISTANCE TO BOTTOM OF SHADE HOLDER OR RING
AL1469	5 3/8 inches	4 11/16 inches
AL1470	5 3/8 inches	4 11/16 inches
AL1471	5 3/8 inches	4 11/16 inches
AL369	5 3/8 inches	3 11/16 inches
AL870	5 3/8 inches	3 11/16 inches
AL871	5 3/8 inches	3 11/16 inches
AL1369	5 3/8 inches	4 inches
AL1370	5 3/8 inches	4 inches
AL1371	5 3/8 inches	4 inches
AL 969	5 3/8 inches	3 1/2 inches
AL 970	5 3/8 inches	3 1/2 inches
AL 971	5 3/8 inches	3 1/2 inches



P & S No. AL969—Ceiling Unit, pull chain type, with short chain and cord, and porcelain ring for exposed lamp.

P & S No. AL970—Same as above, with short insulated chain and porcelain pendant.

P & S No. AL971—Same as above, without switching mechanism.

LAMPS AND GLASSWARE ARE NOT SUPPLIED AND ARE NOT INCLUDED IN THE TRADE NUMBER

The same design in the pull chain type similar to AL859 may be supplied, exposing only the porcelain pendant, known as AL863, or with insulated chain and porcelain pendant, known as AL848. These two devices are used for side wall installation.



P & S No. AL859—Ceiling Unit, pull chain type, for ceiling use.

P & S No. AL898—Same as above, without switching mechanism.

These devices will fit either a $3\frac{1}{4}$ or 4-inch outlet box. They have a standard shade holder groove in the body which will accommodate $2\frac{1}{4}$ -inch metal shade holders. The diameter of the base is $4\frac{1}{2}$ inches and the height overall is $2\frac{1}{4}$ inches.

CATALOG NUMBERS AL859, AL848, AL863, AND AL898 SUPERSEDE FORMER CATALOG NUMBERS AL829, AL830, AL855 AND AL860 RESPECTIVELY



P & S No. AL929—Ceiling Unit, pull chain type, with $2\frac{1}{4}$ -inch shade holder.

P & S No. AL930—Same as above, with short insulated chain and porcelain pendant, for side wall use.


P & S No. AL952—Same as above, exposing only porcelain pendant, for side wall use.

P & S No. AL960—Same as above, without switching mechanism.

THERE are times when the outlet is very close to the top of the medicine cabinet or mirror, in which case many mirror brackets have a base too large to meet this condition. The ALABAX devices illustrated in the group, because of their small neat base, answer the problem very nicely. They are designed for use with $3\frac{1}{4}$ -inch boxes, set flush with the surface.

They are also very useful for lighting closets, small rooms, pantries, cellar entrances, and in fact, any location where a small, neat appearance is desired.

The diameter of the base is $3\frac{3}{4}$ inches. The distance from the base to the bottom of the $2\frac{1}{4}$ -inch shade holder type is $2\frac{5}{8}$ inches, of the porcelain ring type, $2\frac{1}{2}$ inches.

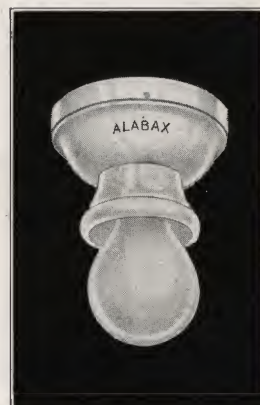

P & S No. AL921—Ceiling Unit, without switching mechanism, with porcelain ring for exposed lamps.

P & S No. AL919—Same as above, pull chain type for ceiling use.

P & S No. AL920—Same as AL919 with short insulated chain and porcelain pendant, for side wall use.

P & S No. AL922—Same as AL920, exposing only porcelain pendant.

COLORS AND STRIPE DECORATIONS APPLYING TO ALABAX FIXTURES

For the purpose of condensing, we have indicated in this catalog the numbers by an abbreviation of the word "ALABAX" and the abbreviation is "AL," which letters precede each of the ALABAX catalog numbers.

White glaze is the standard finish on the ALABAX line. In addition to the white glazed finish, all ALABAX devices are available in the following all-over colors and stripe decorations, except as noted below. The colors and stripe decorations are represented by symbols as shown below. In ordering ALABAX devices with all-over colors or stripe decorations on them, add the symbol to the catalog number.

Note:—The brackets on page 21 cannot be supplied in the stripe decorations.

THE PLAIN WHITE GLAZED DEVICE DOES NOT NEED THE ADDITION OF ANY SYMBOL

Symbol	All-Over Colors	Symbol	All-Over Colors	Symbol	Stripe Decorations
B	Pompeian Green	H	Old Rose	A-1	Blue Stripe
D	Black	J	Olive Green	A-2	Green Stripe
E	Ivory	K	Light Green	A-4	Black Stripe
F	Royal Blue	L	Bronze Brown		
G	Light Blue	M	Orchid		

Example: AL846 is the device when supplied in standard white glaze. AL846-A-4 is the device when supplied with the black stripe. AL846-B is the device when supplied in the Pompeian Green all-over finish.

LAMPS AND GLASSWARE ARE NOT SUPPLIED AND ARE NOT INCLUDED IN THE TRADE NUMBER

SUGGESTIONS TO FACILITATE CHOICE OF FIXTURES

RESIDENCE

LOCATION	CEILING OUTLETS		WALL OUTLETS	
	When Wall Switches Are Used	When Wall Switches Are Not Used	When Wall Switches Are Used	When Wall Switches Are Not Used
Porches, each.....	AL2371, AL1351, AL1371.....	AL1349, AL1369..	AL2864, AL864, AL867.....	AL2872, AL872, AL845.....
Entrances, each.....	AL1200, AL1475, AL2471, AL851..	AL2469, AL849...	AL867, AL864, AL2864.....	AL845, AL2872, AL872.....
Vestibule.....	AL2371, AL1200..	AL1349, AL1369..	AL864, AL2864, AL867.....	AL872, AL2872, AL845.....
Lower or Entrance Hall.....	AL2471, AL1475, AL1471.....	AL2469, AL1469..	AL867, AL2864, AL864.....	AL845, AL2872, AL872.....
Pantry.....	AL951, AL921, AL898.....	AL949, AL919, AL859.....		
Kitchen.....	AL2471, AL1475, AL1471.....	AL2669, AL1469..	AL924, AL852, AL2852, AL980..	AL923, AL846, AL2846, AL990
Upper Hall.....	AL1200, AL2371, AL2471, AL1475..	AL2469, AL849, AL1349, AL1469..	AL2864.....	AL2846.....
Passage Halls, each.....	AL1200, AL951...	AL949.....		
Bathrooms, each.....	AL2471, AL1475, AL1200, AL1471..	AL2669, AL1469..	AL980, AL924, AL981, AL2864, AL864, AL867...	AL990, AL989, AL923, AL2846, AL846, AL845...
Bedrooms.....	AL1200, AL2471, AL1471, AL1475..	AL2469, AL1469, AL849.....	AL924, AL2864, AL864, AL865...	AL923, AL2846, AL873, AL2847
Attic.....	AL898, AL921...	AL859, AL919...		
Cellar and Laundry.....	AL898, AL921, AL951.....	AL859, AL919, AL949.....	AL980, AL984, AL985.....	AL990, AL982, AL983.....
Garage.....	AL1475, AL951, AL898.....	AL1469, AL949, AL859.....	AL980, AL984, AL985.....	AL990, AL982, AL983.....
Sun Room.....	AL1475, AL2471, AL1471, AL1200..	AL1469, AL2469..	AL2864, AL865...	AL2846, AL847
Breakfast Room or Nook.....	AL1200, AL951, AL2471, AL851..	AL949, AL2469, AL849.....	AL924, AL981, AL2864, AL864..	AL990, AL923, AL2846, AL846
Sleeping Porch.....	AL1200, AL951, AL921, AL851...	AL949, AL919, AL849.....	AL980, AL2864, AL924.....	AL990, AL2846, AL923.....
Servants' Sleeping Room.....	AL1200, AL951...	AL949, AL849...	AL980.....	AL990.....
Lavatory.....	AL1200, AL951...	AL949, AL849...	AL2864, AL924...	AL2846, AL923
Closets (each) over 8 sq. ft. floor area	AL921, AL951, AL851.....	AL919, AL949, AL849.....		
Each enclosed space in Attic.....	AL921, AL898...	AL919, AL859...		
Each enclosed space in Cellar.....	AL921, AL898...	AL919, AL859...		
Kitchenette.....	AL921, AL951, AL898.....	AL919, AL949, AL859.....	AL924, AL2852...	AL923, AL2846
Dressing Room.....	AL951, AL851...	AL949, AL849...	AL924, AL980, AL2852.....	AL923, AL990, AL2846.....

HOTEL

Bedrooms.....	AL1200, AL2471, AL1471, AL951..	AL2469, AL1469, AL849.....	AL864, AL2864, AL984, AL867...	AL872, AL2872, AL982, AL845
Bathrooms.....	AL2471, AL1475, AL951, AL851..	AL2469, AL949, AL849.....	AL984, AL2864, AL864, AL866...	AL982, AL2872, AL872, AL844
Lavatories.....	AL2371, AL1200, AL851.....	AL1349, AL2469, AL849.....	AL984, AL985...	AL982, AL983.....
Hallways.....	AL2371, AL2471, AL1200.....	AL1349, AL2469..	AL864, AL866, AL2864.....	AL872, AL844, AL2872.....
Elevator, Fire Escape, Stairway and Exit Lights.....	AL921, AL951, AL898, AL851			

SUGGESTIONS TO FACILITATE CHOICE OF FIXTURES

HOSPITAL

LOCATION	CEILING OUTLETS		WALL OUTLETS	
	When Wall Switches Are Used	When Wall Switches Are Not Used	When Wall Switches Are Used	When Wall Switches Are Not Used
Hallways.....	AL2371, AL2471, AL2671	AL2469, AL2669..		
Private Rooms.....	AL2471.....	AL2469.....	AL924, AL852, AL980, AL2852..	AL923, AL846, AL990, AL2846..
Semi-Private Wards.....	AL2471.....	AL2469.....	AL924, AL852....	AL923, AL846....
Public Wards.....	AL2471, AL2671..	AL2469, AL2669..	AL980, AL2852....	AL990, AL2846....
Parlors—Between Wards (Nurses' Home).....	AL1200, AL1475, AL2471, AL1471..	AL2469, AL1469..	AL852, AL2852....	AL846, AL2846....
Kitchens.....	AL2471, AL2671..	AL2469, AL2669..	AL852, AL980, AL924.....	AL846, AL990, AL923.....
Dining Rooms.....	AL2471, AL2671..	AL2469, AL2669..	AL852, AL2852....	AL846, AL2846....
Operating Rooms.....	AL2471, AL2671..	AL2469, AL2669..	AL2864, AL2852, AL980, AL924....	
Sterilizing Rooms.....	AL2471, AL2671..	AL2469, AL2669..	AL846, AL2846, AL990, AL923....	AL846, AL2846, AL990, AL923....
Attendants' Rooms and Dormitories..	AL1200, AL951, AL1471.....	AL1469, AL849...	AL924, AL852, AL980, AL2852..	AL923, AL846, AL990, AL2846..
Male and Female Infirmaryes.....	AL2471, AL2671..	AL2469, AL2669..	AL852, AL980, AL2852.....	AL872, AL990, AL2872.....

OFFICE BUILDING

General and Private Offices.....	AL2471, AL2671, AL1471, AL1475.	AL2469, AL2669, AL1469		
Office Halls.....	AL2371, AL2471, AL1200.....	AL1349, AL2469..	AL984, AL864, AL924.....	AL990, AL923, AL872.....
Office Lavatories.....	AL2371, AL1200, AL851.....	AL1349, AL849...	AL924, AL864, AL984.....	AL990, AL923, AL872.....
Elevator, Fire Escape, Stairway and Exit Lights.....	AL921, AL951, AL1200			

SCHOOL

Class Rooms.....	AL1475, AL2471, AL1471, AL2671.	AL2469, AL2669, AL1469.....	AL852, AL980, AL2852.....	AL872, AL990, AL2872.....
Corridors.....	AL2371, AL1200, AL2471.....	AL2469, AL849...	AL852, AL2852....	AL872, AL2872....
Lavatories.....	AL1200, AL2371, AL851.....	AL849, AL1349...	AL864, AL984....	AL990, AL872....

FACTORY

Hallways.....	AL2471, AL2671, AL1200.....	AL2469, AL2669..		
Offices.....	AL2671, AL2471, AL1471, AL1475.	AL2669, AL2469,		
Lavatories and Wash Rooms.....	AL951, AL898, AL851, AL921...	AL1469.....	AL984, AL985	

GARAGE

Entrances and Exits.....	AL2471, AL851, AL951, AL898...	AL2669, AL849, AL949, AL859..		
Lavatories and Wash Rooms.....	AL951, AL898, AL2371, AL2471.	AL949, AL859, AL1369, AL2469.	AL984, AL985, AL851.....	AL982, AL983, AL875.....
Work Benches.....			AL980.....	AL990.....
General Illumination.....	AL2471, AL2671, AL1471, AL1475.	AL2469, AL2669, AL1469.....		
Offices.....	AL2471, AL2671..	AL2469, AL2669..		

LIST PRICES

Cat. No.	Page No.	White Each	All-Over Colors Each	Stripe Decorations Each	Stand-ard Package	Carton	Wt.Lbs. Std. Pkg.	Cat. No.	Page No.	White Each	All-Over Colors Each	Stripe Decorations Each	Stand-ard Package	Carton	Wt.Lbs. Std. Pkg.
AL 829	27	\$2.10	\$2.40	\$2.60	24	10	32	AL 983	22	\$1.99	\$2.29	\$2.49	12	2	25
AL 830	27	2.10	2.40	2.60	24	10	31	AL 984	22	1.95	2.25	2.45	12	2	25
AL 844	21	4.60	5.10		10	2	33	AL 985	22	1.89	2.19	2.39	12	2	25
AL 845	21	5.00	5.50		10	2	33	AL 989	22	2.29	2.59	2.79	12	2	25
AL 846	20	5.25	5.75	6.25	10	2	33	AL 990	22	2.35	2.65	2.85	12	2	25
AL 847	20	5.65	6.15	6.65	10	2	33	AL1200	24	2.45	2.75	2.95	12	4	40
AL 848	27	2.10	2.40	2.60	24	10	35	AL1201	24	2.75	3.05	3.25	12	4	42
AL 849	23	2.45	2.75	2.95	24	10	40	AL1202	24	2.45	2.75	2.95	12	4	40
AL 850	23	2.45	2.75	2.95	24	10	40	AL1203	24	2.75	3.05	3.25	12	4	42
AL 851	23	1.45	1.75	1.95	24	10	35	AL1273	30	.30	.45	.55	20	10	5
AL 852	20	4.60	5.10	5.60	10	2	33	AL1274	30	.50	.65	.75	20	10	12
AL 853	20	5.00	5.50	6.00	10	2	33	AL1275	30	.55	.70	.80	20	10	12
AL 855	27	2.10	2.40	2.60	24	10	33	AL1276	30	.10	.25	.35	20	10	5
AL 859	27	2.10	2.40	2.60	24	10	34	AL1300	24	3.00	3.30	3.50	12	4	44
AL 860	27	1.10	1.40	1.60	24	10	30	AL1301	24	3.00	3.30	3.50	12	4	44
AL 863	27	2.10	2.40	2.60	24	10	34	AL1349	23	2.65	2.95	3.15	20	5	38
AL 864	20	4.00	4.50	5.00	10	2	33	AL1350	23	2.65	2.95	3.15	20	5	38
AL 865	20	4.40	4.90	5.40	10	2	33	AL1351	23	1.65	1.95	2.15	20	5	35
AL 866	21	4.00	4.50		10	2	33	AL1369	26	2.85	3.15	3.35	20	5	52
AL 867	21	4.40	4.90		10	2	33	AL1370	26	2.85	3.15	3.35	20	5	52
AL 869	26	2.65	2.95	3.15	20	5	46	AL1371	26	1.85	2.15	2.35	20	5	50
AL 870	26	2.65	2.95	3.15	20	5	46	AL1449	23	2.70	3.00	3.20	20	5	44
AL 871	26	1.65	1.95	2.15	20	5	44	AL1450	23	2.70	3.00	3.20	20	5	44
AL 872	20	4.60	5.10	5.60	10	2	33	AL1451	23	1.70	2.00	2.20	20	5	44
AL 873	20	5.00	5.50	6.00	10	2	33	AL1469	26	2.90	3.20	3.40	20	5	65
AL 875	23	2.45	2.75	2.95	24	10	38	AL1470	26	2.90	3.20	3.40	20	5	65
AL 898	27	1.10	1.40	1.60	24	10	33	AL1471	26	1.90	2.20	2.40	20	5	63
AL 919	27	2.10	2.40	2.60	24	10	28	AL1475	24	3.25	3.55	3.75	12	4	50
AL 920	27	2.10	2.40	2.60	24	10	28	AL1476	24	3.25	3.55	3.75	12	4	50
AL 921	27	1.10	1.40	1.60	24	10	28	AL2371	25	3.00	3.30	3.50	24	4	58
AL 922	27	2.10	2.40	2.60	24	10	30	AL2369	25	3.75	4.05	4.25	20	4	68
AL 923	22	3.00	3.30	3.50	24	10	63	AL2471	25	3.25	3.55	3.75	20	4	64
AL 924	22	2.00	2.30	2.50	24	10	62	AL2669	25	4.75	5.05	5.25	10	2	44
AL 929	27	2.30	2.60	2.80	24	10	30	AL2671	25	4.25	4.55	4.75	10	2	42
AL 930	27	2.30	2.60	2.80	24	10	30	AL2846	19	5.25	5.75	6.25	10	2	30
AL 949	23	2.25	2.55	2.75	24	10	40	AL2847	19	5.65	6.15	6.65	10	2	30
AL 950	23	2.25	2.55	2.75	24	10	40	AL2852	19	4.60	5.10	5.60	10	2	30
AL 951	23	1.25	1.55	1.75	24	10	29	AL2853	19	5.00	5.50	6.00	10	2	30
AL 952	27	2.30	2.60	2.80	24	10	30	AL2864	19	4.00	4.50	5.00	10	2	30
AL 960	27	1.30	1.60	1.80	24	10	29	AL2865	19	4.40	4.90	5.40	10	2	30
AL 962	23	2.25	2.55	2.75	24	10	36	AL2872	19	4.60	5.10	5.60	10	2	30
AL 969	26	2.45	2.75	2.95	20	5	44	AL2873	19	5.00	5.50	6.00	10	2	30
AL 970	26	2.45	2.75	2.95	20	5	44	AL9826	22	2.23	2.53	2.73	12	2	25
AL 971	26	1.45	1.75	1.95	20	5	42	AL9836	22	2.17	2.47	2.67	12	2	25
AL 980	22	2.05	2.35	2.55	12	2	25	AL9896	22	2.47	2.77	2.97	12	2	25
AL 981	22	1.99	2.29	2.49	12	2	25	AL9906	22	2.53	2.83	3.03	12	2	25
AL 982	22	2.05	2.35	2.55	12	2	25								

ASSORTMENT OF COLORS AND STRIPE DECORATIONS

Colors and stripe decorations may be assorted to make up a standard package of any one catalog number.

RATING OF ALABAX FIXTURES

All keyless Alabax fixtures in this catalog have a rating of 660 watts, 250 volts; All pull chain Alabax fixtures 250 watts, 250 volts except AL9826, AL9836, AL9896 and AL9906, page 22. These pull chain fixtures are rated at 660 watts, 250 volts.

PORCELAIN SHADE HOLDERS AND RINGS

White glaze is the standard finish. They can be supplied in colors and stripe decorations which apply to the ALABAX line. Colors and stripe decorations are not guaranteed to match perfectly when these devices are supplied separately.

P & S No. AL1273—2¼-inch shade holder.

P & S No. AL1274—3¼-inch shade holder.

P & S No. AL1275—4-inch shade holder.

P & S No. AL1276—Porcelain ring.



P & S No. AL1273

Porcelain shade holder only.

P & S Ready Wired Sockets



P & S Ready Wired Sockets are put up in lengths of about 500 feet and will be shipped in these lengths unless otherwise specified.

Special lengths will be supplied, subject to specifications, and if wanted, extra lengths of wire can be supplied on each end of the streamer. Extra wire on the ends of the streamers will be charged for at 4½ cents per foot, list, each conductor, for No. 14 wire, and 5 cents per foot, list, each conductor, for No. 12 wire. These sockets are wired up with New Code, single braid, rubber covered, stranded wire.

Quotations and delivery furnished on any spacing of sockets.

These goods are packed in barrels unless reels are specified. An extra charge is made to cover cost of reels.

P & S Ready Wired Cold Molded Sockets

Edison Base Size

660 Watts, 250 Volts



Standard package is 250 of one catalog number.

Wired with No. 14 Wire

Wired with No. 12 Wire

Cat. No.	Centers Inches	Price per 100 Sockets	Cat. No.	Centers Inches	Price per 100 Sockets
220	4	\$31.00	255	4	\$33.60
221	5	31.75	256	5	34.45
222	6	32.50	257	6	35.50
223	7	33.25	258	7	36.10
224	8	34.00	259	8	36.50
225	9	34.75	260	9	37.75
226	10	35.50	261	10	38.55
228	11	36.25	262	11	39.40
229	12	37.00	263	12	40.20
230	13	37.75	264	13	41.10
231	14	38.50	265	14	41.85
232	15	39.25	266	15	42.70
234	16	40.00	267	16	43.50
235	17	40.75	268	17	44.35
236	18	41.50	269	18	45.15
318	19	42.25	270	19	46.00
239	20	43.00	271	20	46.80
240	21	43.75	272	21	47.65
245	22	44.50	273	22	48.45
246	23	45.25	274	23	49.30
248	24	46.00	275	24	50.10
249	25	46.75	276	25	51.00
250	26	47.50	277	26	51.75
251	27	48.25	278	27	52.60
252	28	49.00	279	28	53.40
253	29	49.75	280	29	54.25
254	30	50.50	281	30	55.10

P & S Ready Wired Porcelain Sockets

Edison Base Size

660 Watts, 250 Volts



Standard package is 250 of one catalog number.

Wired with No. 14 Wire

Wired with No. 12 Wire

Cat. No.	Centers Inches	Price per 100 Sockets	Cat. No.	Centers Inches	Price per 100 Sockets
61420	4	\$26.00	66106	4	\$28.60
61421	5	26.75	66107	5	29.45
61422	6	27.50	66108	6	30.50
61423	7	28.25	66109	7	31.10
61424	8	29.00	66110	8	31.50
61425	9	29.75	66111	9	32.75
61426	10	30.50	66112	10	33.55
66086	11	31.25	66113	11	34.40
66087	12	32.00	66114	12	35.20
66088	13	32.75	66115	13	36.10
66089	14	33.50	66116	14	36.85
66090	15	34.25	66117	15	37.70
66091	16	35.00	66118	16	38.50
66092	17	35.75	66120	17	39.35
66093	18	36.50	66122	18	40.15
66094	19	37.25	66124	19	41.00
66095	20	38.00	66126	20	41.80
66096	21	38.75	66128	21	42.65
66097	22	39.50	66130	22	43.45
66098	23	40.25	66132	23	44.30
66099	24	41.00	66134	24	45.10
66100	25	41.75	66136	25	46.00
66101	26	42.50	66138	26	46.75
66102	27	43.25	66140	27	47.60
66103	28	44.00	66142	28	48.40
66104	29	44.75	66144	29	49.25
66105	30	45.50	66146	30	50.10

P & S Ready Wired Durez Sockets

Intermediate Base Size

660 Watts, 250 Volts



Standard package is 250 of one catalog number.

Wired with No. 14 Wire

These devices are not supplied with wire larger than No. 14.

Cat. No.	Centers Inches	Price per 100 Sockets	Cat. No.	Centers Inches	Price per 100 Sockets
6220	4	\$31.00	6236	18	\$41.50
6221	5	31.75	6318	19	42.25
6222	6	32.50	6239	20	43.00
6223	7	33.25	6240	21	43.75
6224	8	34.00	6245	22	44.50
6225	9	34.75	6246	23	45.25
6226	10	35.50	6248	24	46.00
6228	11	36.25	6249	25	46.75
6229	12	37.00	6250	26	47.50
6230	13	37.75	6251	27	48.25
6231	14	38.50	6252	28	49.00
6232	15	39.25	6253	29	49.75
6234	16	40.00	6254	30	50.50
6235	17	40.75		..	

P & S Canopy Switches

3 Amperes, 125 Volts; 1 Ampere, 250 Volts

Narrow Canopy Switches with Parallel Wires



No. 3307

The stem on P & S 3306 is of sufficient length to use with canopies not more than $\frac{1}{16}$ -inch thick. P & S 3307 may be used with canopies up to $\frac{1}{4}$ inch thick.

Fitted with 6 inches of No. 18 B & S stranded fixture wire. Longer wires furnished specially at $4\frac{1}{2}$ cents per foot each conductor.

P & S 3306 and 3307 may be assorted to make standard package quantities.

Cat. No.	For Canopies Thickness Inches	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
3306	$\frac{1}{16}$	10	100	7	\$.60
3307	$\frac{1}{4}$	10	100	8	.60

Fixture Supporting Canopy Switches

With Rotating Stem and Lock Nuts

P & S 3312 is a combination canopy switch and bracket supporting stem. The stem is $\frac{1}{8}$ -inch pipe size and $1\frac{1}{16}$ inches long. Stem turns on switch body for adjusting in assembly.

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
3312	10	100	11	\$.65



No. 3312

P & S Fixture Supporting Canopy Switches



Will support bracket and control light. Used with stud boxes. Has threaded stem $\frac{1}{8}$ -inch pipe size. Stem may be threaded into a box strap built for switch, permitting installation on a switch box.

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
3310	10	100	12	\$.75

No. 658 P & S Durez Cord Connectors

This connector is small in size and is designed to accommodate rubber covered wire up to No. 16. Designed for solder connection. No screw terminals.

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
658	25	100	6	\$.15



P & S Porcelain Pull Canopy Switches

250 Watts, 250 Volts

Standard finish of chain, stem and lock nut is brush brass.

The diameter of the switch stem is $\frac{1}{32}$ inch. Punch $\frac{1}{8}$ -inch pipe size.

Fitted with short chain and cord with ball. For special finish on chain and lock nut, add 2 cents to list.

Outlet box fitters or washers for $\frac{1}{2}$ -inch knockout supplied with each switch.



Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
3317	10	100	19	\$.65

No. 3316 P & S Pull Canopy Switches

With Stem and Lock Nut

3 Amperes, 125 Volts; 1 Ampere, 250 Volts



Standard finish of chain, stem and lock nut is brush brass. For special finish on chain and lock nut, add 2 cents.

The diameter of the switch stem is $\frac{1}{32}$ inch.

Punch, $\frac{1}{8}$ inch pipe size.

Fitted with short chain and cord. Outlet box fitters or washers for $\frac{1}{2}$ -inch knockout supplied with each switch.

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
3316	10	100	19	\$.75

P & S Pull Fixture-Body Switches

For Lighting Units

3 Amperes, 125 Volts; 1 Ampere, 250 Volts

Standard finish of chain is brush brass. No extra charge for nickel. Special finish on short chain, 2 cents list extra; on long chain, 10 cents list extra.

Bottom nipple on all Fixture-Body Switches is $\frac{1}{8}$ inch.

Each switch is fitted with 6-inch No. 16 stranded rubber-covered N.E.C. standard wires.

Each chain is fitted with chain connector and tassel.

Short chain and 6-foot linen cord with ball can be supplied instead of 3-foot chain, without extra charge. Extra cord beyond 6 feet, 1 cent list per foot.

Cat. No.	Top Nipple Inches	LENGTH OF CHAIN		Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
		Ft.	In.				
3055	$\frac{1}{4}$	..	8	10	20	7	\$.85
3056	$\frac{1}{4}$	3	..	10	20	7	.95
3057	$\frac{3}{8}$	3	..	10	20	7	.95
3058	$\frac{3}{8}$	..	8	10	20	7	.85
3059	$\frac{1}{8}$	3	..	10	20	7	.95
3060	$\frac{1}{8}$	..	8	10	20	7	.85




No. 3055

Those Who Know the Facts, Insist on ALABAX

P & S Uno Shade-Holders

With Screws



No. 501

Uno Shade-holders are threaded to receive threaded bead of brass sockets and receptacles.

Standard finish is brush brass which will be furnished unless otherwise specified.

Cat. No.	Size In.	Description	Car-ton	Std. Pkg.	Wt., Lbs.		PRICE, PER 100	
					Std. Pkg.	Fin-ished	Fin-ished	Unfin-ished
501	2 1/4	With Screws.....	50	500	24	\$6.00	\$5.50	
532	2 1/4	Solid, with Screws..	50	500	35	8.50	7.75	
503		Form H, with Screws	25	250	30	15.50	13.75	
505	3 1/4	With Screws.....	25	250	37	14.85	13.05	
534	3 1/4	Solid, with Screws..	25	250	37	15.90	14.20	
511	4	With Screws.....	10	100	17	20.55	18.35	
536	4	Solid, with Screws..	10	100	20	23.45	21.65	

P & S Uno Shade-Holders

Wire Spring

Uno Shade-holders are threaded to receive threaded bead of brass sockets and receptacles.

Standard finish is brush brass which will be furnished unless otherwise specified.



No. 502

Cat. No.	Size In.	Description	Car-ton	Std. Pkg.	Wt., Lbs.		PRICE, PER 100	
					Std. Pkg.	Fin-ished	Fin-ished	Unfin-ished
502	2 1/4	Wire Spring.....	50	250	20	\$9.25	\$8.75	
533	2 1/4	Solid, Wire Spring..	50	250	20	9.05	8.00	
504		Form H, Wire Spring	25	100	15	15.90	14.20	
506	3 1/4	Wire Spring.....	25	100	18	19.00	17.50	
535	3 1/4	Solid, Wire Spring..	25	100	18	19.35	17.85	

P & S Shade-Holders

For porcelain sockets and receptacles. The standard finish is brush brass.



Cat. No.	Size Holder Inches	Car-ton	Std. Pkg.	Wt., Lbs.		Price per 100
				Std. Pkg.	Std. Pkg.	
119	2 1/4	24	288	16		\$8.50
1190	3 1/4	12	144	10		16.25

P & S Standard Shade-Holders

For Porcelain Shurlok Sockets and Receptacles

Standard finish is brush brass.

Cat. No.	Size In.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price per 100
1245	2 1/4	20	100	13	\$17.00
1246	3 1/4	20	100	14	25.50



No. 1245

P & S Uno Shade-Holders

Banner Screwless

Threaded to receive threaded bead of brass sockets and receptacles. Brush brass finish will be furnished unless otherwise specified.




Cat. No.	Size In.	Car-ton	Std. Pkg.	Wt., Lbs.		PRICE, PER 100	
				Std. Pkg.	Fin-ished	Fin-ished	Unfin-ished
732	2 1/4	50	500	48	\$8.00	\$7.50	

No. 3000 P & S 2-Button Single Circuit Pendent Switches

6 Amperes, 125 Volts; 3 Amperes, 250 Volts

A slight turn locks the shell. Lower half of shell is anchored to body.

Standard finish, brushed brass. Special finishes at an advance of 10 cents each.



Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
3000	10	100	25	\$.50

No. 3090 P & S Pony Pendent Push Button Switches

6 Amperes, 125 Volts; 3 Amperes, 250 Volts

Standard finish, brushed brass. Special finishes at an advance of 10 cents each.

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
3090	10	100	10	\$.50



No. 3091 P & S Feed Through Push Button Switches

6 Amperes, 125 Volts; 3 Amperes, 250 Volts

Especially designed for use on heating device cords. Standard finish, polished nickel. Special finishes at an advance of 10c each.

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
3091	10	50	13	\$.50



P & S Cold-Molded Pendent Switch and Convenience Outlet

6 Amperes, 125 Volts; 3 Amperes, 250 Volts

Controls light above and serves appliance below.

Bottom outlet, for parallel or tandem blade plug, is independent of switching mechanism.

No. 1551 is the same as No. 1550 but is supplied with 5 feet of 3-conductor black cotton covered cord.

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1550	10	50	12	\$.75
1551	10	50	42	1.50



No. 1550

No. 493 P & S Pulleys

With Wood Screw Threads

Brushed brass is the finish regularly furnished.

For all other finishes, add 2 cents to price.



Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
493	100	100	5	\$.14

No. 1169 P & S 2-Piece Threaded Chain Guide

For use with ceiling bands and special spinnings using chain pull devices.

Punch required is 1/8-inch pipe size.

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1169	50	50	..	\$.05



Those Who Know the Facts, Insist on ALABAX

Supply Parts for P & S Chain Pull Sockets and Receptacles

Cat. No.	Description	Std. Pkg.	Price per Foot or Each	Add for Special Finish
586	Ball, Black Composition, for Black Cord.....	250	\$.06	...
247	Ball, White Composition, for White Cord.....	250	.06	...
130	Chain, No. 3 Small Beaded.....	500 Ft.	.05	\$.02
578	Chain, No. 6 Standard Beaded.....	1000 Ft.	.05	.02
581	Chain, No. 6, 8-Inch with P & S Tassel and Sleeve.....	250	.13	.02
582	Chain, No. 6, 8-Inch with Fiber Insulation, P & S Tassel and Sleeve.....	250	.21	.02
*217	Chain, Short Nickel, Splicing Link, White Cord and White Ball.....	250	.16	.02
*575	Chain, Short, Splicing Link, Black Cord and Black Ball...	250	.16	.02
576	Cord, Black.....	120 Ft.	.01	...
*580	Cord, Black, with Black Ball...	250	.16	...
227	Cord, White.....	120 Ft.	.01	...
*237	Cord, White, with White Ball...	250	.16	...
1120	Link, Insulating, No. 6 Chain...	100	.08	...
107	Link, Splicing, No. 3 Chain...	200	.02 1/2	.02
299	Link, Splicing, No. 6 Chain...	200	.02 1/2	.02
211	Pendant, Porcelain, Large, for No. 3 and No. 6 Chain...	100	.06	...
242	Pendant, Porcelain, Small, for No. 3 and No. 6 Chain...	100	.06	...
127	Tassel, P & S, with Sleeve for No. 3 Chain...	50	.06	.02
585	Tassel, P & S, with Sleeve for No. 6 Chain...	250	.06	.02

*Cords are 4 to 6 feet long.

Supply Parts for P & S Fluto and Flutolier Sockets

Without Catalog Numbers

Caps, Shells, Linings and Interiors

For caps without linings, deduct 1/2 cent each from regular list. For pendent caps without bushings, deduct 1 1/2 cents from regular list.

Description	Std. Pkg.	Price Each
Shells, Key without Lining.....	250	\$.10
Shells, Keyless without Lining.....	250	.10
Shells, Pull, without Lining.....	250	.10
Shells, Push, without Lining.....	250	.10
Linings, Shell, All Types.....	250	.007
Linings, Cap, All Types.....	250	.001 1/2
Interiors, Key, 250 Watts.....	250	.17
Interiors, Key, 660 Watts.....	250	.23
Interiors, Keyless.....	250	.13
Interiors, 250-Watt Pull, with Guide, Less Chain and Ball.....	250	.22
Interiors, 250-Watt Pull, with Guide, Chain and Ball.....	250	.26
Interiors, 250-Watt Pull, without Guide, with Chain and Ball.....	250	.24
Interiors, 250-Watt Pull, without Guide or Chain and Ball.....	250	.20
Interiors, 660-Watt Pull, with Chain and Guide.....	250	.34
Interiors, 660-Watt Pull, without Chain or Guide.....	250	.28
Interiors, 660-Watt Pull, with Chain but without Guide.....	250	.32
Interiors, 660-Watt Pull, with Guide but without Chain.....	250	.30
Interiors, Flutolier, Push and Removable Buttons.....	250	.25
Interiors, Flutolier, Push with Permanent Buttons.....	250	.18

For complete listing of Mogul caps and bodies, see Mogul parts.

Special Finishes for P & S Devices and Accessories

Finish	Class	Finish	Class
Barff, Bauer Lacquer...	A	Copper, Brush.....	B
Brass, Sand Blast, Antique	E	Copper, Oxidized.....	B
Brass, Sand Blast, Brush	D	Copper, Polished.....	B
Brass, Flemish.....	B	Enamel, White Lacquer	A
Brass, Lemon.....	A	Gilt, Rich.....	A
Brass, Oxidized.....	B	Gun Metal.....	B
Brass, Polished.....	A	Nickel, Dull.....	B
Bronze, Brush.....	B	Nickel, Polished.....	B
Bronze, Japanese (Dark)	B	Silver, Butler's (Brushed)	F
Bronze, Polished.....	B	Silver, Satin.....	F
Bronze, Statuary (Light)	B	Silver, Oxidized.....	F
Copper, Antique.....	C	Silver, Polished.....	F
Copper, Mottled.....	B	Verde-Antique Lacquer.	A

Add to List

Col. 1. Complete Brass Shell Key, Keyless and Push Devices, Canopy Switches.

Col. 2. Complete Brass Shell Pull Devices.

Col. 3. Brass Shell Key, Keyless and Push Bodies. All Shade Holders.

Col. 4. Brass Shell Pull Bodies. Add to List.

Col. 5. Brass Shell Socket Caps and Brass Mounted Porcelain Socket Caps. Canopy Switch Knobs and Collars.

Col. 6. One-Piece Brass Shell Wall and Ceiling Devices and Fluto Bases.

Col. 7. Metal Covered Attachment Plug Caps, 10-Ampere Caps.

Col. 8. Single Flush Plates. Add to Brush Brass List. For multiple gang plates, charges cover first gang only; for second or any additional units of a multiple gang plate, charge is 10 cents per gang for all special finishes listed.

Unfinished plates, if polished and buffed, will be furnished at the same price as brush brass; plates not polished and buffed, at the same price as Passmour finish. Passmour finish is a durable matte brass lacquered finish.

Class of Finish	Col. 1	Col. 2	Col. 3	Col. 4	Col. 5	Col. 6	Col. 7	Col. 8
A	\$.06	\$.08	\$.03	\$.05	\$.03	\$.12	\$.04	\$.10
B	.10	.12	.05	.07	.05	.16	.08	.15
C	.16	.18	.08	.10	.08	.25	.10	.20
D	.18	.20	.09	.11	.09	.28	.08	.25
E	.22	.24	.11	.13	.11	.30	.12	.30
F	.20	.30	.10	.20	.10	.25	.14	.45

Other Lacquered Finishes

The finishes listed above are electroplated, except the Bauer Barff, White Enamel and Verde-Antique which are lacquered. Devices can be furnished in other lacquered finishes on order. A sample of finish desired must be submitted to determine the number of coats of lacquer needed.

Add to List

Lacquer	Col. 1	Col. 2	Col. 3	Col. 4	Col. 5	Col. 6
1 Coat	\$.04	\$.06	\$.02	\$.04	\$.02	\$.10
2 Coats	.06	.08	.03	.05	.03	.12
3 Coats	.08	.10	.04	.06	.04	.14

The standard finish, unless otherwise noted, is brush brass. Standard and special finishes on devices of one number may be assorted to make up the standard package.

All special finishes, other than those listed, including gold, will be quoted upon application. A sample of the finish desired should be submitted to aid in filling order.

The tabulated prices of special finishes above apply to small lots, but when ordering quantity lots of 1 order, 1 number and 1 finish, the extra list for the special finish only will be reduced as follows:

Socket Material	Plates (1 Finish)
250-500.....	10% 100-500 Gangs..... 10%
500-1000.....	20% 500-1000 Gangs..... 20%
1000, Over.....	50% 1000 Gangs, Over..... 50%

Mogul shells and caps take double the list prices above. Special finishes on brass keys, advance 2 cents each.

Chain guides, standard or extension, advance 2 cents.

Pull chain devices can be supplied without extra charge, with 3 feet of cord and short chain.

Pull sockets in standard finishes, but with chain eyelet, chain and tassel only, in special finish, add to list the difference between columns 1 and 2 for desired finish,

P
A
S
S
&
S
E
Y
M
O
U
R

I
N
C

P & S Socket Accessories

Sockets with Extra Long Keys

The standard length of keys is $\frac{7}{8}$ inch.

Sockets with extra long keys may not be assorted to make up standard packages.

Additions to list prices of sockets provided with extra long keys are as follows:

Description	Car- ton	Std. Pkg.	Add to List Price, Each
Devices with 1½-Inch Keys.....	25	100	\$.05
Devices with 2-Inch Keys.....	10	100	.05

Sockets with Brass Keys



No. S16 with
Threaded
Mandrel

Brass keys are threaded and detachable, making it possible to use these sockets in extremely tight husk work.

Any Fluto key socket can be furnished with the threaded mandrel and brass key.

The advance for special finishes on such sockets is the same as for standard sockets.

Standard packages, where the quantities exceed 100, are reduced to that figure; where the quantities do not exceed 100, standard packages remain the same. Brushed brass is the standard finish.

No assortment is permitted.

Additions to list prices of sockets and receptacles provided with brass keys, or threaded mandrels, as follows:


Description	Add to List Price, Each
With Threaded Mandrel, 6-32 Thread.....	\$.07
With $\frac{7}{8}$ -Inch Brass Key.....	.10
With 1½-Inch Brass Key.....	.15
With 2-Inch Brass Key.....	.15

For special finish on brass keys, add 2 cents each.

Fluto and Flutolier Pull Sockets and Receptacles with Chain Guides



No. 1103 Standard
Chain Guide



No. 1106 Extension
Chain Guide

Sockets with extension chain guides may not be combined with regular sockets to make up standard package quantity.

Special finishes take the same advance as regular sockets or receptacles.

Flutolier and Fluto Chain Guides are not interchangeable.

Fluto Chain Guides

Cat. No.	Extension Inches	Standard Type		Price, Each	
		Car- ton	Std. Pkg.	Attached	Separate
1103	...	50	250		\$.05
Extension Type					
1104	$\frac{3}{8}$	25	50	\$.10	\$.15
1105	$\frac{1}{4}$	25	50	.10	.15
1106	1	25	50	.10	.15
1107	$\frac{1}{4}$	25	50	.10	.15
1108	$\frac{1}{2}$	25	50	.10	.15
1109	$\frac{3}{4}$	10	50	.10	.15
1110	2	10	50	.10	.15

Flutolier Chain Guides

Cat. No.	Extension Inches	Standard Type		Price, Each	
		Car- ton	Std. Pkg.	Attached	Separate
1112	...	50	250		\$.05
Extension Type					
1113	$\frac{3}{8}$	25	50	\$.10	\$.15
1114	$\frac{1}{4}$	25	50	.10	.15
1115	1	25	50	.10	.15
1116	$\frac{1}{4}$	25	50	.10	.15
1117	$\frac{1}{2}$	25	50	.10	.15
1118	$\frac{3}{4}$	25	50	.10	.15
1119	2	25	50	.10	.15

Chain guides ordered separately from sockets and in assorted quantities, the standard package is 100. For special finishes, add 2 cents each for any type.

Sockets with Insulated Chain

For pull sockets or receptacles when furnished with insulated chain, add to list price 8 cents each.

Chain pull or receptacle bodies, when furnished without chain and ball, take a reduction in the list price of 5 cents each.

Standard package quantities are unchanged.

P & S Adjustable Adapters

For Outlet Box Devices

For Shallow Boxes

For use with $\frac{3}{8}$ -inch stud.

Supporting screws 1½ inches long.



No. 1164

Cat. No.	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1164	10	50	8	\$.07

For BX Type Boxes

For use with $\frac{3}{8}$ -inch stud.

Supporting screws $\frac{7}{8}$ inch long.

Cat. No.	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1162	10	50	8	\$.07

For Deep Boxes

For use with $\frac{3}{8}$ -inch stud.

Supporting screws 1½ inches long.

Cat. No.	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1163	10	50	8	\$.07



No. 1163

Box Straps



No. 1165

For use with $\frac{3}{4}$ and 4-inch boxes.

Supporting screws 1½ inches long.

Cat. No.	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1165	10	50	8	\$.07

P & S Conduit Box Straps

For Attaching Receptacles to Outlet Boxes with or without Studs



Nos. 1179, 1182



Nos. 1180, 1181

Cat. No.	With Locknut Inches	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1179	$\frac{3}{8}$	10	50	8	\$.05
1182	$\frac{1}{2}$	10	50	8	.05
1180	$\frac{3}{8}$	10	50	8	.07
1181	$\frac{1}{2}$	10	50	8	.07

No. 1160 P & S Outlet Box Straps

Screw spacing, $1\frac{1}{32}$ inches on centers.

Furnished complete with screws and 2 lock nuts for attaching P & S devices to a $\frac{3}{8}$ -inch fixture stud.



Cat. No.	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1160	10	50	50	\$.08

No. 1161 P & S Loom Box Straps

Screw spacing, $1\frac{1}{32}$ inches on centers.


Furnished complete with screws and $\frac{3}{8}$ -inch male nipple for attaching P & S devices to a loom box in ceiling bands and other lighting units.



Cat. No.	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1161	10	50	8	\$.09

P & S Little Gem Concealed Rosettes

Diameter of base, $2\frac{1}{4}$ inches. Height, $1\frac{1}{2}$ inches. Holes for supporting screws are spaced $1\frac{1}{2}$ inches on centers.



2-Piece Fusible				
2 Amperes, 125 Volts				
Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
*390	10	100	46	\$.20


2-Piece Fuseless				
660 Watts, 250 Volts				
Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
79	10	100	46	\$.16

*Not N. E. C. Standard.

P & S Little Gem Cleat Rosettes

Base is $2\frac{1}{8} \times 2\frac{1}{8}$ inches. Holes for supporting screws are spaced $1\frac{1}{16}$ inches on centers.

2-Piece Fusible				
2 Amperes, 125 Volts				
Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
*400	10	100	40	\$.20




2-Piece Fuseless				
660 Watts, 250 Volts				
Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
76	10	100	40	\$.16

*Not N. E. C. Standard.

P & S Little Gem Moulding Rosettes

Base is $2\frac{1}{16} \times 2\frac{1}{16}$ inches. Holes for supporting screws are spaced $1\frac{1}{16}$ inches on centers.



2-Piece Fusible				
2 Amperes, 125 Volts				
Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
*810	10	100	42	\$.20

2-Piece Fuseless				
660 Watts, 250 Volts				
Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
176	10	100	42	\$.16

*Not N. E. C. Standard.

P & S Porcelain Concealed Rosettes


Diameter, $2\frac{1}{2}$ inches. Height, $1\frac{1}{4}$ inches. Holes for supporting screws are spaced $1\frac{1}{2}$ inches on centers.

2-Piece Fuseless				
660 Watts, 250 Volts				
Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
604	10	100	44	\$.19



P & S Porcelain Concealed Terminal Cleat Rosettes

Base is 1×3 inches. Height, $1\frac{1}{2}$ inches. Holes for supporting screws are $1\frac{1}{2}$ inches on centers.



2-Piece Fuseless				
660 Watts, 250 Volts				
Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
607	25	100	27	\$.17

P & S Concealed Porcelain Rosettes

For Wood Moulding or Conduit Fittings

Base is $2\frac{3}{4} \times 1\frac{1}{2}$ inches. Height, $1\frac{5}{16}$ inches. Holes for supporting screws are spaced $2\frac{3}{32}$ inches on centers.

2-Piece Fuseless				
660 Watts, 250 Volts				
Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
610	10	100	25	\$.17




P & S Cleat or Concealed Rosettes

Base is $2\frac{25}{32} \times 2\frac{25}{32}$ inches. Height, $1\frac{1}{4}$ inches. Holes for supporting screws are spaced $1\frac{1}{16}$ inches on centers.



1-Piece Fuseless				
660 Watts, 250 Volts				
Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1999	10	100	24	\$.10

P & S Porcelain Outlet Box Covers



These covers are without brass fittings.

Each carton contains extra outlet box screws.

For Use on $3\frac{1}{4}$ -Inch Boxes Only

Screw holes spaced $2\frac{3}{4}$ inches. Outside diameter, $3\frac{21}{32}$ inches.

Cat. No.	Description	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1172	Fuseless for Pendant	10	100	43	\$.10
1167	Porcelain Blank Cover	10	100	46	.12

For Use on 4-Inch Boxes Only

Screw holes spaced $3\frac{1}{2}$ inches. Outside diameter, $4\frac{21}{32}$ inches.

Cat. No.	Description	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1173	Fuseless for Pendant	5	100	90	\$.17
1168	Porcelain Blank Cover	5	100	90	.20

P & S Porcelain Outlet Box Rosettes

660 Watts, 250 Volts

These rosettes are fitted with brass terminals.

Each carton contains extra outlet box screws.



For Use on $3\frac{1}{4}$ -Inch Boxes Only

Screw holes spaced $2\frac{3}{4}$ inches. Outside diameter, $3\frac{21}{32}$ inches.

Cat. No.	Description	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1174	Fuseless for Pendant	10	100	52	\$.22

For Use on 4-Inch Boxes Only

Screw holes spaced $3\frac{1}{2}$ inches. Outside diameter, $4\frac{21}{32}$ inches.

Cat. No.	Description	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1175	Fuseless for Pendant	5	100	90	\$.30

P & S Fuseless Brass Covered Rosettes

660 Watts, 250 Volts

Diameter base, $4\frac{21}{32}$ inches.

Spring Clip Contact

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
200	10	50	60	\$.80

Binding Screw Contact

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
112	10	50	60	\$.80

P & S Pull Canopy Fixture Switch Rosettes

10 Amperes, 125 Volts
5 Amperes, 250 Volts

Can be used on $3\frac{1}{4}$ or 4-inch outlet boxes. Supplied with cord and ball.

Outside diameter of base is $4\frac{25}{32}$ inches. Height of rosette, $3\frac{3}{4}$ inches. Brass canopy snaps on or off without the use of tools.



With $\frac{3}{8}$ -Inch Nipple

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1211	5	20	35	\$1.75

With Porcelain Bushing

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1213	5	20	35	\$1.75

Keyless, with Porcelain Bushing

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1214	5	20	30	\$1.00

No. 170 P & S Porcelain Rosette Ceiling Buttons

Glazed



Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price per 100
170	50	250	50	\$5.70

P
A
S
&
S
E
Y
M
O
U
R

I
N
C



P & S Pull Snap Switches

Ceiling Type—Single-Pole

5 Amperes, 250 Volts; 10 Amperes, 125 Volts

Supplied with 8-foot cord.

Cat. No.	Description	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
2309	Slotted.....	10	30	20	\$1.00
2387	Solid.....	10	30	20	1.00

P & S Duet and Trio Flush Tumbler Switches

10 Amperes, 125 Volts; 5 Amperes, 250 Volts

Two or three-circuit mechanisms, with a common feed, mounted in the same porcelain base, saving labor, material and space.

The living room light, the porch light and the upstairs hallway light can be controlled separately from one neat outlet.

The porcelain base is $1\frac{1}{4}$ inches deep, $2\frac{1}{16}$ inches long, and $1\frac{3}{4}$ inches wide. Supporting screw spacings are $3\frac{3}{16}$ inches.

Black composition handle.

Cat. No.	Description	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1822	2-Circuit.....	2	10	5 $\frac{1}{2}$	\$.85
1833	3-Circuit.....	2	10	6	1.10

Plates

B-18402	.040-Inch, for 2 Levers.....	2	10	2	\$.14
B-18403	.040-Inch, for 3 Levers.....	2	10	2	.14
B-18602	.060-Inch, for 2 Levers.....	2	10	2	.18
B-18603	.060-Inch, for 3 Levers.....	2	10	2	.18

No. 1821 P & S Switch and Receptacle Combination

Double-Pole, Indicating Switch—Bakelite Plate

5 Amperes, 250 Volts; 10 Amperes, 125 Volts



This switch and receptacle combination is useful where a convenience outlet is desired at the switch location.

The porcelain base is $1\frac{5}{16}$ inches deep, $2\frac{1}{16}$ inches long, and $1\frac{1}{16}$ inches wide.

Supporting screw spacings are $3\frac{3}{16}$ inches.

Cat. No.	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1821	1	10	7	\$1.35

No. 16 P & S Round Switch Bases

5 or 10 Amperes

May be used for various types of wall and ceiling receptacles.

Outside diameter, $2\frac{19}{32}$ inches.



Cat. No.	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
16	25	100	23	\$.06

No. 17 P & S Square Switch Bases

5 or 10 Amperes



For moulding work. Also for various types of wall and ceiling receptacles, or 5 and 10-ampere standard snap switches.

Outside dimensions, $2\frac{1}{16}$ inches.

Cat. No.	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
17	25	100	25	\$.06

P & S Surface Switches

Single-Pole—With Metal Covers

5 Amperes, 125 Volts; 3 Amperes, 250 Volts

Diameter of base, 2 inches; height over cover, $1\frac{13}{32}$ inches; over handle, $1\frac{5}{16}$ inches. Screw spacings, $1\frac{3}{8}$ inches.



Cat. No.	Description	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1611	Solid, Non-Ind.....	10	100	26	\$.23
1612	Slotted, Non-Ind....	10	100	26	.23
1613	Solid, Ind.....	10	100	26	.32
1614	Slotted, Ind.....	10	100	26	.32

10 Amperes, 125 Volts; 5 Amperes, 250 Volts

Diameter of base, $2\frac{1}{16}$ inches; height over cover, $1\frac{1}{16}$ inches; over handle, $2\frac{1}{4}$ inches. Screw spacings, $1\frac{3}{4}$ inches.

Cat. No.	Description	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1615	Solid, Non-Ind.....	10	100	33	\$.48
1616	Slotted, Non-Ind....	10	100	33	.48
1617	Solid, Ind.....	10	100	33	.54
1618	Slotted, Ind.....	10	100	33	.54



Double-Pole—With Metal Covers

5 Amperes, 250 Volts

Diameter of base, 2 inches; height over cover, $1\frac{1}{16}$ inches; over handle, $2\frac{1}{16}$ inches. Screw spacings, $1\frac{3}{8}$ inches.




Cat. No.	Description	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1621	Solid, Non-Ind.....	10	100	28	\$.56
1622	Slotted, Non-Ind....	10	100	28	.56
1623	Solid, Ind.....	10	100	28	.64
1624	Slotted, Ind.....	10	100	28	.64

10 Amperes, 250 Volts

Diameter base, $2\frac{1}{16}$ inches; height over cover, $1\frac{1}{16}$ inches; over handle, $2\frac{1}{4}$ inches. Screw spacings, $1\frac{3}{4}$ inches.

Cat. No.	Description	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1625	Solid, Non-Ind.....	10	100	41	\$.66
1626	Slotted, Non-Ind....	10	100	41	.66
1627	Solid, Ind.....	10	100	41	.76
1628	Slotted, Ind.....	10	100	41	.76



3-Point—With Metal Covers

3 Amperes, 125 Volts; 1 Ampere, 250 Volts

Diameter of base, 2 inches; height over cover, $1\frac{13}{32}$ inches; over handle, $1\frac{5}{16}$ inches. Screw spacings, $1\frac{3}{8}$ inches.



Cat. No.	Description	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1631	Solid, Non-Ind.....	10	100	27	\$.48
1632	Slotted, Non-Ind....	10	100	27	.48

5 Amperes, 125 Volts; 3 Amperes, 250 Volts

Diameter of base, $2\frac{1}{4}$ inches; height over cover, $1\frac{13}{32}$ inches; over handle, $1\frac{5}{16}$ inches. Screw spacings, $1\frac{1}{2}$ inches.

Cat. No.	Description	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1633	Solid, Non-Ind.....	10	100	32	\$.56
1634	Slotted, Non-Ind....	10	100	32	.56



4-Point—With Metal Covers

5 Amperes, 125 Volts; 2 Amperes, 250 Volts

Diameter of base, $2\frac{1}{16}$ inches; height over cover, $1\frac{1}{16}$ inches; over handle, $2\frac{1}{4}$ inches. Screw spacings, $1\frac{3}{4}$ inches.



Cat. No.	Description	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1641	Solid, Non-Ind.....	10	30	15	\$.86
1642	Slotted, Non-Ind....	10	30	15	.86

Standard finish on metal covers is polished nickel.

P & S Flush Tumbler Switches



No. 1815

The mechanism of these switches has few parts and is positive in action. Ruggedly constructed terminals allow ample wiring room.

Dimensions of porcelain cups: Single-pole switches: Length $2\frac{1}{16}$ inches; width $1\frac{1}{16}$ inches; depth $1\frac{3}{32}$ inches. All other switches: Length $2\frac{1}{16}$ inches; width $1\frac{1}{16}$ inches; depth $1\frac{3}{32}$ inches.

Supporting screw spacings:

Outside $3\frac{3}{32}$ inches; inside $2\frac{1}{16}$ inches.

Suitable machine screws are furnished for mounting these devices on boxes. Adjustable plaster ears will be furnished without extra charge when specified.

Porcelain Cups—Composition Handles

The stationary shields, which prevent dirt from entering mechanism, are brown to match the brown indicating handles.

Cat. No.	Description	AMPERES		Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
		125 Volts	250 Volts				
1815	Single-Pole, Ind....	10	5	10	100	37	\$.35
1825	Double-Pole, Ind....	10	10	10	50	22	.70
1835	3-Point.....	10	5	10	50	23	.50
*1844	4-Point.....	5	2	10	10	5	1.00
1855	Double-Pole, Ind....	20	10	10	10	5	.80

Porcelain Cups—Radiant Handles

The radiant handles, a non-detachable part of the switch, are moulded of transparent material with an enclosed radium-covered locator or pilot. They remain brilliantly luminous in dark locations and can be readily seen from any angle.

1815-R	Single-Pole, Ind...	10	5	5	50	20	\$1.00
1825-R	Double-Pole, Ind..	10	10	5	10	5	1.35
1835-R	3-Point.....	10	5	5	20	10	1.15
*1844-R	4-Point.....	5	2	5	5	5	1.65
1855-R	Double-Pole.....	20	10	5	5	5	1.45

*Not N. E. C. Standard.

No. 1820 P & S Switch and Pilot Light Combination

Double-Pole, Indicating Switch—.060-Inch Brass Plate

10 Amperes, 125 Volts

This combination is useful when remote control of garage, attic and cellar lights, as well as other locations, is desired. It acts as an indicator.

The porcelain base is $1\frac{1}{16}$ inches deep, $2\frac{1}{16}$ inches long, and $1\frac{1}{16}$ inches wide.

Supporting screw spacings are $3\frac{3}{32}$ inches.

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1820	1	10	15	\$2.00

P & S Shallow Cup Push Switches

For Use in Thin Partitions

Porcelain cups are $2\frac{1}{16}$ inches long, $1\frac{1}{32}$ inches deep. No. 1717 is $1\frac{1}{16}$ inches wide. Nos. 1727, 1737, 1744 and 1757 are $1\frac{1}{16}$ inches wide.

Supporting screw spacings: Outside, $3\frac{3}{32}$ inches; inside, $2\frac{1}{16}$ inches.


Suitable machine screws are furnished for mounting these devices on boxes.

No.	Description	AMPERES		Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
		125 Volts	250 Volts				
1717	Single-Pole	10	5	10	100	33	\$.35
1727	Double-Pole	10	10	10	50	19	.70
1737	3-Point	10	5	10	50	20	.50
1744	4-Point	5	2	10	10	5	1.00
1757	Double-Pole	20	10	10	50	25	.80



No. 1835-R

P & S 2-Button Push Switches



Single-pole and double-pole switches are regularly made with one pearl and one composition button; 3-point and 4-point switches with two composition buttons.

Length of porcelain cups, $2\frac{1}{16}$ inches; width, $1\frac{1}{16}$ inches; depth, $1\frac{1}{16}$ inches. Supporting screw spacings: Outside, $3\frac{3}{32}$ inches; inside, $2\frac{1}{16}$ inches.

Suitable machine screws are furnished for mounting these devices on boxes.

Cat. No.	Description	AMPERES		Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
		125 Volts	250 Volts				
1715	Single-Pole	10	5	10	100	44	\$.45
1725	Double-Pole	10	10	10	50	25	.70
1735	3-Point	10	5	10	50	25	.70
1745	4-Point	10	5	10	10	7	1.00
1755	Double-Pole	20	10	10	20	12	.80

P & S Push Lock Switches

One No. 1799 key is furnished with each lock switch.

Length of porcelain cups, $2\frac{1}{16}$ inches; width, $1\frac{1}{16}$ inches; depth, $1\frac{1}{16}$ inches.

Supporting screw spacings: Outside, $3\frac{3}{32}$ inches; inside, $2\frac{1}{16}$ inches.

Suitable machine screws are furnished for mounting these devices on boxes.

Cat. No.	Description	AMPERES		Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
		125 Volts	250 Volts				
1716	Single-Pole	10	5	10	100	56	\$.90
1726	Double-Pole	10	10	10	50	32	1.15
1736	3-Point	10	5	10	50	31	1.15
1746	4-Point	10	5	10	10	7	1.45
1756	Double-Pole	20	10	10	20	12	1.25

Push button and push lock switches of the same description may be assorted in carton quantities to make up standard package quantity; for example, Nos. 1725 and 1726, and no other assortment is permissible.

Keys for P & S Push Lock Switches



One of these keys is furnished without charge with each push lock switch.

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1799	20	100		\$.10

No. 1510 P & S Black Porcelain Double-T-Slot Single Receptacles

10 Amperes, 250 Volts

Supporting screw spacing, $3\frac{3}{32}$ inches and $2\frac{3}{8}$ inches on centers. Depth of back, $\frac{3}{4}$ inch.

Cat. No.	Dimen. Inches	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1510	$1\frac{1}{16} \times 2\frac{1}{2}$	10	100	36	\$.30

No. 1520 P & S Black Porcelain Double-T-Slot Duplex Receptacles

10 Amperes, 250 Volts

Supporting screw spacing, $3\frac{3}{32}$ inches on centers. Depth of back, $\frac{3}{4}$ inch.


Cat. No.	Dimen. Inches	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1520	$1\frac{1}{16} \times 2\frac{5}{8}$	10	50	20	\$.48



No. 1516 P & S Duplex Receptacle and Bull's Eye Pilot Light Combination

Ready Wired, 2-Gang, Solid Plate

10 Amperes, 125 Volts



The lamp, directly behind the bull's eye, lights when a connection is made to either receptacle. The face of either receptacle is designed so that attachment plugs are inserted without difficulty.

The porcelain base is $1\frac{1}{16}$ inches deep, $3\frac{1}{2}$ inches long and $2\frac{3}{16}$ inches wide. Supporting screw spacings are $3\frac{3}{8}$ inches on centers vertically and

$1\frac{13}{16}$ inches on centers horizontally.

Cat. No.	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1516	1	10	18	\$2.35

P & S Composition Convenience Outlet Single Receptacles

Side-Wired

10 Amperes, 250 Volts

Brown is standard finish.

Cat. No.	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1511	10	100	20	\$.30
With Plaster Ears				
1531	10	100	22	\$.30



P & S Composition Convenience Outlet Duplex Receptacles

10 Amperes, 250 Volts

Brown is standard finish.

Cat. No.	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1521	10	100	26	\$.48
With Plaster Ears				
1541	10	100	28	\$.48



P & S Receptacles with Metal Plates For 4 and $3\frac{1}{4}$ -Inch Boxes

10 Amperes, 250 Volts



Standard finish is japanned iron.

Single Receptacles

Cat. No.	Description	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1512	With 4-Inch Plate...	5	50	30	\$.40
1513	With $3\frac{1}{4}$ -inch Plate.	10	100	40	.35

Duplex Receptacles

1522	With 4-Inch Plate...	5	50	30	\$.60
1523	With $3\frac{1}{4}$ -Inch Plate.	10	50	25	.55

Molded Materials

There are several different materials used in the molding of P & S Wiring Devices in addition to porcelain, genuine bakelite and cold molded composition, as follows:

(a) **Colasta**.—This material is a phenol-resin composition which will withstand temperatures of 450° Fahrenheit. It has a high lustre and is very strong.


(b) **Durez**.—This material is also a phenol-resin composition which will withstand temperatures of 450° Fahrenheit and has a high lustre. It is very strong.

P & S Flush Plates

For Tumbler Switches



No. B-1841

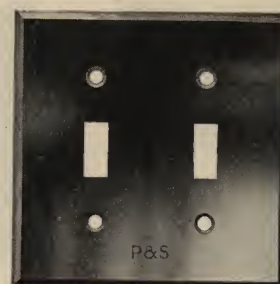

No. B-1842

Solid Brass Plates

One Horizontal Row

Cat. No.	Description	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
B-1801	1-Gang	*	*	28	\$.34
B-1802	2-Gang	*	*	26	.68
B-1803	3-Gang	*	*	24	1.02
B-1804	4-Gang	*	*	22	1.36

Price of brush brass plates, above 4 gangs, when dimensions and spacings are standard, is 40 cents list per gang.

Struck Up Brass Plates

.060-Inch—One Horizontal Row

Cat. No.	Description	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
B-1861	1-Gang	*	*	25	\$.18
B-1862	2-Gang	*	*	23	.36
B-1863	3-Gang	*	*	21	.54
B-1864	4-Gang	*	*	19	1.04

Price of brush brass .060-inch plates, above 4 gangs, when dimensions and spacings are standard, is 26 cents list per gang.

.040-Inch—One Horizontal Row

Cat. No.	Description	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
B-1841	1-Gang	*	*	18	\$.14
B-1842	2-Gang	*	*	32	.28
B-1843	3-Gang	*	*	48	.42
B-1844	4-Gang	*	*	20	.88
B-1845	5-Gang	*	*	19	1.10
B-1846	6-Gang	*	*	20	1.32

Price of brush brass .040-inch plates, above 6 gangs, when dimensions and spacings are standard, is 22 cents list per gang.

Struck Up Passmour Plates

.040-Inch—One Horizontal Row

Passmour finish is a durable matte brass lacquered finish.

Cat. No.	Description	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
BL-1841	1-Gang	*	*	18	\$.10
BL-1842	2-Gang	*	*	31	.20
BL-1843	3-Gang	*	*	48	.30
BL-1844	4-Gang	*	*	20	.72
BL-1845	5-Gang	*	*	19	.90
BL-1846	6-Gang	*	*	20	1.08

Price of Passmour .040-inch plates, above 6 gangs, when dimensions and spacings are standard, is 18 cents list per gang.

Standard finish is brush brass, which will be furnished when no finish is specified.

*A standard package of plates consists of a sufficient quantity to accommodate 100 flush tumbler switches of the same style. A carton is one-fifth of a standard package except as otherwise stated. Any of above plates may be assorted in various finishes, thicknesses and gangs to make up carton and standard package quantities.

P & S Flush Plates For 2-Button Push Switches



No. 1741



No. 1742

Solid Brass Plates

One Horizontal Row

Cat. No.	Description	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
B-1701	1-Gang	*	*	33	\$.34
B-1702	2-Gang	*	*	35	.68
B-1703	3-Gang	*	*	32	1.02
B-1704	4-Gang	*	*	30	1.36

Price of brush brass plates, above 4 gangs, when dimensions and spacings are standard, is 40 cents list per gang.

Struck Up Brass Plates

.060-Inch—One Horizontal Row

Cat. No.	Description	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
B-1761	1-Gang	*	*	30	\$.18
B-1762	2-Gang	*	*	27	.36
B-1763	3-Gang	*	*	25	.54
B-1764	4-Gang	*	*	23	1.04

Price of brush brass .060-inch plates, above 4 gangs, when dimensions and spacings are standard, is 26 cents list per gang.

.040-Inch—One Horizontal Row

Cat. No.	Description	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
B-1741	1-Gang	*	*	24	\$.14
B-1742	2-Gang	*	*	32	.28
B-1743	3-Gang	*	*	48	.42
B-1744	4-Gang	*	*	19	.88
B-1745	5-Gang	*	*	18	1.10
B-1746	6-Gang	*	*	22	1.32

Price of brush brass .040-inch plates, above 6 gangs, when dimensions and spacings are standard, is 22 cents list per gang.

Struck Up Passmour Plates

.040-Inch—One Horizontal Row

Passmour finish is a durable matte brass lacquered finish.

Cat. No.	Description	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
BL-1741	1-Gang	*	*	24	\$.10
BL-1742	2-Gang	*	*	32	.20
BL-1743	3-Gang	*	*	47	.30
BL-1744	4-Gang	*	*	19	.72
BL-1745	5-Gang	*	*	18	.90
BL-1746	6-Gang	*	*	22	1.08

Price of Passmour .040-inch plates, above 6 gangs, when dimensions and spacings are standard, is 18 cents list per gang.

Standard finish is brush brass which will be furnished when no finish is specified.

*A standard package of plates consists of a sufficient quantity to accommodate 100 flush push switches of the same style. A carton is one-fifth of a standard package except as otherwise stated. Any of the above plates may be assorted in various finishes, thicknesses and gangs to make up carton and standard package quantities.

Hemco Molded Wall Plates

Hemco Wall Plates are molded of bakelite. They are spot-proof, warp-proof and tarnish-proof. The rich satin finish is molded into the surface and will last always, supplying the finishing touch of beauty for every wiring job.

Bakelite headed attaching screws are standard and are included with all plates. Metal screws finished to match plates furnished on special orders.

Hemco Molded Push Button Switch Plates



No. HP801

Cat. No.	Description	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
HP801	1-Gang.....	20	100	13	\$.12
HP802	2-Gang.....	10	50	12	.24
HP803	3-Gang.....	5	30	10	.36
HP804	4-Gang.....	4	20	9	.48


Hemco Molded Tumbler Switch Plates

Cat. No.	Description	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
HT801	1-Gang.....	20	100	13	\$.12
HT802	2-Gang.....	10	50	12	.24
HT803	3-Gang.....	5	30	10	.36
HT804	4-Gang.....	4	20	9	.48
HT822	2-Gang, Tandem	10	50	12	.50



No. HT801

Hemco Molded Receptacle Wall Plates




No. HR702

Cat. No.	Description	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
HR701	Single Receptacle.	20	100	12	\$.12
HR702	Duplex Receptacle.	20	100	12	.12
HT731	Telephone Receptacle.....	20	100	12	.12
HJ741	Radio Receptacle.	20	100	12	.12

Hemco Molded Combination Plates

Cat. No.	Description	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
HT901	For Tumbler Switch and Single Receptacle.	10	50	12	\$.24
HT902	For Tumbler Switch and Duplex Receptacle.	10	50	12	.24



No. HT902

Hemco Molded Blank Plates

Cat. No.	Description	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
H781	1-Gang.....	20	100	13	\$.12
H782	2-Gang.....	10	50	12	.24

Hemco Bakelite and Brass Screws

H750	Bakelite Headed Screw..	100	1000	4	\$.02½
H751	Brass Screw, Finished to Match Plate.....	100	1000	3	.02½

Hemco Heater Plugs and Cord Sets



This cord set combines No. H251 Hemco Pul-Cord Attachment Plug at one end with the No. H250 Hemco Heater Plug at the other. Six feet of flexible cord is used. The unit package is packed in an attractive display carton.


No. H250 Hemco Heater Plugs are molded of an especially compounded material, known for its mechanical strength. The plug is practically unbreakable and is unaffected by the heat of any electrical appliance in regular service. Natural glossy finish.

Cat. No.	Description	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
H253	Cord Set.....	10 Sets	50 Sets	27	\$ 1.50
H250	Heater Plug Only.	10	100	17	.45

P & S Convenience Outlet Plates




No. 1580



No. 1588



No. 1590



No. 1598

Struck Up Plates—Brush Brass Finish

.040-Inch

Cat. No.	Plate for Receptacles	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1580	1 Single	*	18	\$.14
1588	2 Single	*	45	.28
1590	1 Duplex	†	10	.14
1598	2 Duplex	†	20	.28

Struck Up Plates—Passmour Finish

.040-Inch

Passmour finish is a durable matte brass lacquered finish.

Cat. No.	Plate for Receptacles	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1585	1 Single	*	18	\$.10
1586	2 Single	*	45	.20
1595	1 Duplex	†	10	.10
1596	2 Duplex	†	20	.20

*Standard package consists of sufficient assorted plates for 100 single receptacles. One-fifth standard package will be considered carton quantity.

†Standard package consists of sufficient assorted plates for 50 duplex receptacles. One-fifth standard package will be considered carton quantity.

Single and duplex plates cannot be assorted to make standard package quantities.

Solid Plates—Brush Brass Finish

.100-Inch

Cat. No.	Plate for Receptacles	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1581	1 Single	*	..	\$.34
1582	2 Single	*	..	.68
1583	3 Single	*	..	1.02
1584	4 Single	*	..	1.60
1591	1 Duplex	†	..	.34
1592	2 Duplex	†	..	.68
1593	3 Duplex	†	..	1.02
1594	4 Duplex	†	..	1.60

*Standard package consists of sufficient assorted plates for 100 receptacles.

†Standard package consists of sufficient assorted plates for 100 receptacles.

No. H251 Hemco Pul-Cord Attachment Plugs

This attachment plug is molded of bakelite. It is not affected by heat or moisture.



Cat. No.	Description	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
H251	Plug Complete.....	10	100	15	\$.25
H251CO	Cap Only.....	10	100	10	.16
H251BO	Body Only.....	10	100	5	.12

P & S Attachment Plug Caps

Standard Composition

Cat. No.	Cord Hole In.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
DA	13/32	10	250	25	\$.10
DB	9/32	10	250	25	.10



No. DB

Standard Brass-Covered

DC	13/32	10	250	27	\$.25
----	-------	----	-----	----	-------

Polarized Composition

Cat. No.	Cord Hole In.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
DAP	13/32	10	250	25	\$.10
DBP	9/32	10	250	25	.10

Polarized Brass-Covered

DCP	13/32	10	250	27	\$.25
-----	-------	----	-----	----	-------

Armored Cord Grip



No. DG

Cat. No.	Cord Hole In.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
DG	13/32	10	50	8	\$.20
*DH	1/2	10	50	8	.20

*The DH cap is countersunk to seat 5/8-inch cord.

P & S Pony 2-Piece Attachment Plugs

660 Watts, 250 Volts

Pony Caps



No. DE

Cat. No.	Cord Hole In.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
DE	9/32 x 3/8	25	500	32	\$.08
DF	13/32	25	500	32	.08



No. 1504

Pony Plug Body

1504	...	25	500	30	\$.07
------	-----	----	-----	----	-------


Complete Pony Plugs

With DE Cap

Cat. No.	Car-ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
1503	25	500	60	\$.15

With DF Cap

1505	25	500	60	\$.15
------	----	-----	----	-------



No. 1503

ALABAX

Porcelain Lighting Fixtures
are Shown on Pages
19 to 30 Inclusive

No. H200 Hemco Twin-Lite Plugs

660 Watts, 250 Volts

This plug is the correct angular shape for baseboard receptacle or under shades and reflectors.

Molded in one piece of bakelite.

Cat. No.	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
H200	10	100	22	\$.60



No. H202 Hemco Tach-Lite Plugs

660 Watts, 250 Volts

Threaded outlets permit the use of Uno or standard shade holders. Clamp type shade holders fasten directly above threaded end. Shade permits lamp to hang straight down.

Cat. No.	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
H202	10	100	22	\$.60



No. H203 Hemco Trip-Lite Plugs

660 Watts, 250 Volts

This plug permits the servicing of 2 appliances and one light.

Molded in one piece of bakelite.

Cat. No.	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
H203	10	100	30	\$1.00



No. H204 Hemco Thru-Lite Plugs

660 Watts, 250 Volts

Molded in one piece of bakelite. This plug is shock-proof, heat-proof and mar-proof. It is equipped with prong-type side outlets.

Cat. No.	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
H204	10	100	22	\$.90



No. H205 Hemco Tee-Lite Plugs

660 Watts, 250 Volts

Designed to fit all standard prong-type receptacles. Fits close to the baseboard.

Molded in one piece of bakelite.

Cat. No.	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
H205	10	100	20	\$.60



No. H206 Hemco Tee-Prong Plugs

660 Watts, 250 Volts

Designed to fit all standard prong-type receptacles and for standard prong-type attachments. Has self-locating feature for attaching attachment plugs. Molded of bakelite.

Cat. No.	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
H206	10	100	15	\$.50



No. H207 Hemco Trip-Prong Plugs

660 Watts, 250 Volts

This plug fits close to the baseboard. It is molded in one piece of bakelite. Shock-proof, heat-proof and mar-proof.

Cat. No.	Car- ton	Std. Pkg.	Wt., Lbs. Std. Pkg.	Price Each
H207	10	100	20	\$.60



INDEX TO CATALOG NUMBERS

Cat. No.	Cat. Page	Cat. No.	Cat. Page
BA.....	4	PN.....	8
BB.....	4	PO.....	7
BC.....	4	PQ.....	7
BD.....	4	PR.....	7
BE.....	4	PU.....	7
BF.....	5	PW.....	7
BJ.....	5	PY.....	7
BK.....	5	PZ.....	7
BL.....	5	RA.....	18
BM.....	5	RB.....	18
BN.....	5	8.....	33
BO.....	5	9.....	33
BR.....	5	16.....	39
BR and 1164.....	5	17.....	39
BT.....	5	S-17.....	3
BU.....	5	S-19.....	3
CA.....	4	S-20.....	3
CB.....	4	S-21.....	3
CC.....	4	S-22.....	3
CD.....	4	S-23.....	3
CG.....	4	S-24.....	4
CH.....	4	S-25.....	4
CI.....	4	S-26 Shurlok.....	6
CJ.....	4	S-27.....	7
CK.....	4	S-29 Shurlok.....	3
CL.....	4	S-30 Shurlok.....	3
CM.....	4	S-31 Shurlok.....	3
CN.....	4	S-32 Shurlok.....	3
CO.....	4	S-34.....	5
CR.....	4	S-34 Special.....	5
CX.....	4	S-35.....	6
DA.....	43	S-36.....	6
DAP.....	43	S-37.....	4
DB.....	43	S-38 Shurlok.....	6
DBP.....	43	S-39 Shurlok.....	7
DC.....	43	40.....	11
DCP.....	43	41.....	11
DE.....	43	S-47.....	7
DF.....	43	S-50.....	13
DG.....	43	S-53.....	13
DH.....	43	54.....	14
FA.....	6	S-54.....	13
FB.....	6	S-56.....	13
FC.....	6	S-57 Shurlok.....	7
FF.....	6	S-62.....	18
FH.....	6	S-63.....	18
FK.....	6	S-65.....	3
FX.....	6	S-66.....	7
MA.....	13	S-72 Shurlok.....	18
MB.....	13	S-73 Shurlok.....	18
MC.....	13	S-75 Shurlok.....	3
MD.....	13	76.....	38
ME.....	13	78.....	10
MF.....	13	79.....	38
MG.....	13	80.....	33
MH.....	13	85.....	10
MI.....	13	90.....	3
PA.....	7	90 Shurlok.....	3
PB.....	7	107.....	36
PC.....	7	108.....	9
PD.....	7	110.....	11
PE.....	7	112.....	38
PF.....	7	119.....	35
PG.....	7	122.....	11
PH.....	7	127.....	36
PI.....	7	130.....	36
PK.....	7		
PL.....	8		
PM.....	8		

P
A
S
S
&
S
E
Y
M
O
U
R
.
I
N
C.

P A S S & S E Y M O U R . I N C.

Cat. No.	Cat. Page	Cat. No.	Cat. Page	Cat. No.	Cat. Page	Cat. No.	Cat. Page
139 1/2	33	281	31	HP-803	42	1106	37
139 1/2 C	33	291	32	HT-803	42	1107	37
141	33	299	36	HP-804	42	1108	37
142	33	318	31	HT-804	42	1109	37
144	33	327	9	810	38	1110	37
145	33	328	9	HT-822	42	1112	37
170	38	347	9	AL-829	27	1113	37
176	38	390	38	AL-830	27	1114	37
198	8	400	38	831	8	1115	37
200	38	417	12	843	8	1116	37
H-200	44	418	12	AL-844	21	1117	37
H-202	44	422	33	AL-845	21	1118	37
H-203	44	424	12	AL-846	20	1119	37
H-204	44	425	12	AL-847	20	1120	36
H-205	44	427	15	AL-848	27	1140	16
H-206	44	428	10	AL-849	23	1160	37
H-207	44	430	32	AL-850	23	1161	37
211	36	439	15	AL-851	23	1162	37
217	36	442	11	AL-852	20	1163	37
220	31	443	11	AL-853	20	1164 and BR	5
221	31	451	10	854	8	1164	37
222	31	456	11	AL-855	27	1165	37
223	31	457	11	856	8	1167	38
224	31	464	32	857	8	1168	38
225	31	486	18	858	8	1169	35
226	31	486-B	18	AL-859	27	1170	18
227	36	487	18	AL-860	27	1171	18
228	31	487-B	18	861	8	1172	38
229	31	493	35	AL-863	27	1173	38
230	31	501	35	AL-864	20	1174	38
231	31	502	35	AL-865	20	1175	38
232	31	503	35	AL-866	21	1178	18
234	31	504	35	AL-867	21	1179	37
235	31	505	35	AL-869	26	1180	37
236	31	506	35	AL-870	26	1181	37
237	36	511	35	AL-871	26	1182	37
239	31	516	13	AL-872	20	1190	35
240	31	520	12	AL-873	20	1197	16
242	36	532	35	AL-875	23	AL-1200	24
245	31	533	35	877	8	AL-1201	24
246	31	534	35	878	15	AL-1202	24
247	36	535	35	AL-898	27	AL-1203	24
248	31	536	35	HT-901	42	1211	38
249	31	540 Shurlok	32	HT-902	42	1213	38
250	31	542	32	AL-919	27	1214	38
H-250	42	542 Shurlok	32	AL-920	27	1215	8
251	31	575	36	AL-921	27	1217	18
H-251	43	576	36	AL-922	27	1228	3
H-251BO	43	578	36	AL-923	22	1245	8
H-251CO	43	580	36	AL-924	22	1245	35
252	31	581	36	AL-929	27	1246	35
253	31	582	36	AL-930	27	1247	18
H-253	42	585	36	AL-949	23	1248	18
254	31	586	36	AL-950	23	1260	16
255	31	598	10	AL-951	23	1261	4
256	31	599	10	AL-952	27	1262	9
257	31	604	38	AL-960	27	AL-1273	30
258	31	607	38	AL-962	23	AL-1274	30
259	31	610	38	AL-969	26	AL-1275	30
260	31	630	32	AL-970	26	AL-1276	30
261	31	633	32	AL-971	26	1277	8
262	31	633 Shurlok	32	AL-980	22	1278	17
263	31	658	34	AL-981	22	1279	16
264	31	677	15	AL-982	22	1299	8
265	31	698	10	AL-983	22	AL-1300	24
266	31	699	10	AL-984	22	AL-1301	24
267	31	HR-701	42	AL-985	22	AL-1349	23
268	31	HR-702	42	AL-989	22	AL-1350	23
269	31	HT-731	42	AL-990	22	AL-1351	23
270	31	732	35	994	17	1359	16
271	31	HJ-741	42	995	17	1360	16
272	31	H-750	42	996	17	AL-1369	26
273	31	H-751	42	997	17	AL-1370	26
274	31	778	14	998	17	AL-1371	26
275	31	H-781	42	999	17	1401	33
276	31	H-782	42	1009	10	1402	33
277	31	HP-801	42	1010	10	1403	33
278	31	HT-801	42	1103	37	1404	33
279	31	HP-802	42	1104	37	1405	33
280	31	HT-802	42	1105	37		

Cat. No.	Cat. Page	Cat. No.	Cat. Page	Cat. No.	Cat. Page	Cat. No.	Cat. Page
1410	10	B-1742	42	3057	34	6215	9
AL-1449	23	BL-1742	42	3058	34	6220	31
AL-1450	23	B-1743	42	3059	34	6221	31
AL-1451	23	BL-1743	42	3060	34	6222	31
AL-1469	26	1744	40	3090	35	6223	31
AL-1470	26	B-1744	42	3091	35	6224	31
AL-1471	26	BL-1744	42	3306	34	6225	31
AL-1475	24	1745	40	3307	34	6226	31
AL-1476	24	B-1745	42	3310	34	6228	31
1503	43	BL-1745	42	3312	34	6229	31
1504	43	1746	40	3316	34	6230	31
1505	43	B-1746	42	3317	34	6231	31
1506	18	BL-1746	42	3994	17	6232	31
1510	40	1755	40	3994WAA	17	6234	31
1511	41	1756	40	3995	17	6235	31
1512	41	1757	40	3995WAA	17	6236	31
1513	41	B-1761	42	3996	17	6239	31
1516	41	B-1762	42	3996WAA	17	6240	31
1520	40	B-1763	42	3997	17	6245	31
1521	41	B-1764	42	3997WAA	17	6246	31
1522	41	1799	40	3998	17	6248	31
1523	41	B-1801	41	3998WAA	17	6249	31
1531	41	B-1802	41	3999	17	6250	31
1541	41	B-1803	41	3999WAA	17	6251	31
1550	35	B-1804	41	4000	10	6252	31
1551	35	1815	40	4001	10	6253	31
1580	43	1815-R	40	4003	15	6254	31
1581	43	1820	40	4004	8	6318	31
1582	43	1821	39	4005	8	6403	14
1583	43	1822	39	4007	8	6421	6
1584	43	1825	40	4008	8	6482	6
1585	43	1825-R	40	4010	17	S-6600	7
1586	43	1833	39	4011	17	6715	12
1588	43	1835	40	4012	17	6878	15
1590	43	1835-R	40	4013	12	7001	5
1591	43	B-1841	41	4014	16	7006	5
1592	43	BL-1841	41	4021	17	7035	5
1593	43	B-1842	41	4022	17	7047	16
1594	43	BL-1842	41	4023	16	7053	5
1595	43	B-1843	41	4024	16	7109	16
1596	43	BL-1843	41	4026	17	7994	17
1598	43	1844	40	4027	17	7995	17
1611	39	B-1844	41	4028	17	7996	17
1612	39	1844-R	40	4029	17	7997	17
1613	39	BL-1844	41	4030	17	7998	17
1614	39	B-1845	41	4031	17	7999	17
1615	39	BL-1845	41	4032	17	8137	18
1616	39	B-1846	41	4035	15	8138	18
1617	39	BL-1846	41	4036	15	8139	18
1618	39	1855	40	4037	15	9171	12
1621	39	1855-R	40	4050	33	9366	33
1622	39	B-1861	41	4051	33	9366 Shurlok	33
1623	39	B-1862	41	4052	33	9402	12
1624	39	B-1863	41	4057	17	9403	12
1625	39	B-1864	41	4058	17	AL-9826	22
1626	39	1900	9	4059	17	AL-9836	22
1627	39	1901	9	4060	17	AL-9896	22
1628	39	1999	38	4103	16	AL-9906	22
1631	39	2000	32	4109	15	B-18402	39
1632	39	2002	32	4120	8	B-18403	39
1633	39	2003	32	4132	15	B-18602	39
1634	39	2309	39	4135	16	B-18603	39
1641	39	AL-2371	25	4190	9	43310	32
1642	39	2387	39	4191	9	50715	12
B-1701	42	AL-2469	25	4192	9	50716	12
B-1702	42	AL-2471	25	4203	16	50717	9
B-1703	42	AL-2669	25	4230	8	59108	15
B-1704	42	AL-2671	25	4235	16	59427	15
1715	40	AL-2846	19	S-4700	7	59482	3
1716	40	AL-2847	19	5400	14	59482 Shurlok	3
1717	40	AL-2852	19	5401	14	60020	11
1725	40	AL-2853	19	5403	14	60227	6
1726	40	AL-2864	19	5404	14	60317	6
1727	40	AL-2865	19	S-5700 Shurlok	7	60327	6
1735	40	AL-2872	19	6000	33	60666	32
1736	40	AL-2873	19	6001	9	61072	14
1737	40	3000	35	6054	14	61227	6
B-1741	42	3055	34	6090	6	61317	6
BL-1741	42	3056	34	6198	9	61327	6

PASS & SEYMOUR INC.

GENERAL INDEX

P
A
S
S
&
S
E
Y
M
O
U
R
.
I
N
C.

A	Cat. Page
Adapters, Box.....	37
Adapters, Candelabra.....	9
Adapters, Intermediate.....	9
Alabax Brackets.....	19, 20, 21, 22, 23
Alabax Ceiling Fixtures.....	23, 24, 25, 26, 27
Alabax Decorations.....	27
Alabax Porcelain Lighting Fixtures.....	19 to 30 Inc.
Alabax Shade Holders.....	30
Aluminum Shade Holders.....	18
Aluminum Sockets.....	18
Attachment Plugs.....	43, 44
B	
Bases, Attachment Plug.....	5
Bases, Socket, Fluto.....	4, 5
Bases, Socket, Porcelain.....	7, 8
Bases, Switch.....	39
Blocks, Fuse, Transformer.....	33
Bodies, Attachment Plug.....	43
Bodies, Socket, Fluto.....	3
Bodies, Socket, Flutolier.....	5, 6
Bodies, Socket, Porcelain.....	6, 7
Bodies, Switch, Fluto.....	3, 4
Brackets, Alabax.....	19, 20, 21, 22, 23
Bull's Eye and Receptacle Combination.....	41
Buttons, Ceiling.....	38
C	
Candelabra Receptacles.....	14, 15
Candelabra Sockets.....	9
Candle Sockets.....	8, 9
Canopy Switches.....	34
Caps, Attachment Plug.....	43
Caps, Socket, Fluto.....	4
Caps, Socket, Flutolier.....	6
Caps, Socket, Porcelain.....	7
Ceiling Fixtures, Alabax.....	23, 24, 25, 26, 27
Chain, Fixture.....	18
Clamps, Conduit.....	33
Cleats, Suspension.....	32
Connectors, Cord.....	34
Convenience Outlets.....	40, 41
Convenience Receptacles.....	18
Cord Connectors.....	34
Cord Sets.....	42
Covers, Box.....	38
Cutouts, Transformer.....	33
D	
Decorations, Alabax.....	27
Decorative Sets.....	32
E	
Embossed Ring Receptacles.....	16
F	
Feed Through Switches.....	35
Finishes, Plate.....	36
Finishes, Socket.....	36
Fixture Chain.....	18
Fixture Loops.....	18
Fixture Receptacles.....	16, 17, 18
Fixture Sockets.....	8, 9, 16, 17
Fixture Switches.....	34, 35
Fixtures, Ceiling, Alabax.....	23, 24, 25, 26, 27
Fixtures, Lighting, Porcelain, Alabax.....	19 to 30 Inc.
Fluto Socket Bases.....	4, 5
Fluto Socket Caps.....	4
Fluto Sockets.....	3, 4, 5
Flutolier Socket Bodies.....	5, 6
Flutolier Socket Caps.....	6

G	Cat. Page
Flutolier Sockets.....	5, 6
Fuse Blocks, Transformer.....	33
H	
Guides, Chain.....	35, 37
I	
Hangers, Conduit.....	33
Heater Plugs.....	42
Hemco Plugs.....	42, 43, 44
Holders, Shade.....	35
Holders, Shade, Alabax.....	30
Holders, Shade, Aluminum.....	18
J	
Insulators, Strain.....	33
K	
Keys, Switch.....	40
L	
Lighting Fixtures, Porcelain, Alabax.....	19 to 30 Inc.
Lighting Sets, Decorative.....	32
Loops, Fixture.....	18
M	
Mogul Receptacles.....	12, 13
Mogul Sockets.....	13
N	
Outlets, Convenience.....	40, 41
O	
Parts, Socket.....	36, 37
Pendent Switches.....	35
Pilot Light and Switch Combination.....	40
Plates, Outlet.....	42, 43
Plates, Receptacle.....	42, 43
Plates, Special Finishes.....	36
Plates, Switch.....	41, 42
Pliers, Ring Receptacle.....	16
Plugs, Anti-Paint.....	14
Plugs, Attachment.....	43, 44
Plugs, Heater.....	42
Plugs, Hemco.....	42, 43, 44
Porcelain Lighting Fixtures, Alabax.....	19 to 30 Inc.
Porcelain Receptacles.....	10, 11, 12, 13, 14, 15, 16, 17
Porcelain Sockets.....	6, 7, 8, 13, 18, 31, 33
Pulleys.....	35
Push Switches.....	40
R	
Receptacle Plates.....	42, 43
Receptacle and Bull's Eye Combination.....	41
Receptacle and Switch Combination.....	39
Receptacles, Bayonet.....	9, 11
Receptacles, Brass Covered.....	10, 11
Receptacles, Candelabra.....	14, 15
Receptacles, Convenience.....	18
Receptacles, Fixture.....	16, 17, 18
Receptacles, Flush.....	40, 41
Receptacles, Intermediate Base.....	12, 14
Receptacles, Lamp Grip.....	13
Receptacles, Mogul.....	12, 13
Receptacles, Porcelain.....	10, 11, 12, 13, 14, 15, 16, 17
Reflector Sockets.....	18
Rosettes.....	38

S	Cat. Page
Sets, Cord.....	42
Shade Holders.....	35
Shade Holders, Alabax.....	30
Shade Holders, Aluminum.....	18
Shurlok.....	2, 3, 6, 7, 8, 18, 32, 33
Sign Receptacles.....	12, 14, 15
Socket Bases, Fluto.....	4, 5
Socket Bases, Porcelain.....	7, 8
Socket Bodies, Fluto.....	3
Socket Bodies, Flutolier.....	5, 6
Socket Bodies, Porcelain.....	6, 7
Socket Caps, Fluto.....	4
Socket Caps, Flutolier.....	6
Socket Caps, Porcelain.....	7
Socket Finishes.....	36
Socket Parts.....	36, 37
Sockets, Aluminum.....	18
Sockets, Angle.....	8
Sockets, Brass Shell.....	3, 4, 5, 6, 17
Sockets, Candelabra.....	9
Sockets, Candle.....	8, 9
Sockets, Decorative.....	32
Sockets, Festoon.....	31, 32
Sockets, Fixture.....	8, 9, 16, 17
Sockets, Fluto.....	3, 4, 5
Sockets, Flutolier.....	5, 6
Sockets, Husk.....	8
Sockets, Intermediate Base.....	6
Sockets, Lamp Grip.....	13
Sockets, Mogul.....	13
Sockets, Molded.....	32
Sockets, Parts of.....	36
Sockets, Porcelain.....	6, 7, 8, 13, 18, 31, 33
Sockets, Ready Wired.....	31, 32
Sockets, Reflector.....	18
Sockets, Shurlok.....	2, 3, 6, 7, 8, 18, 32, 33
Sockets, Special Finishes.....	36
Sockets, Temporary Decorative.....	32
Sockets, Weatherproof.....	31, 32, 33
Sockets, Wired.....	31, 32
Straps, Box.....	37
Sub-Bases.....	10
Switch Bases.....	39
Switch Bodies, Fluto.....	3, 4
Switch Plates.....	41, 42
Switch and Pilot Light Combination.....	40
Switch and Receptacle Combination.....	39
Switches, Canopy.....	34
Switches, Ceiling.....	39
Switches, Feed Through.....	35
Switches, Fixture.....	34, 35
Switches, Flush.....	39, 40
Switches, Lock.....	40
Switches, Pendent.....	35
Switches, Push.....	40
Switches, Surface.....	39
Switches, Tumbler.....	39, 40
Switches with Convenience Outlet.....	35
T	
Transformer Cutouts.....	33
Tumbler Switches.....	39, 40
U	
Units, Ceiling, Alabax.....	23, 24, 25, 26, 27
W	
Wrenches, Socket.....	4, 16
Wrenches, Receptacle.....	16



P&S

**ALABAX
PORCELAIN
LIGHTING
FIXTURES**



ALABAX

P&S


PORCELAIN LIGHTING FIXTURES



GREEN STRIPE
(P & S No. AL 859-A2)



JET BLACK
(P & S No. AL 921-D)

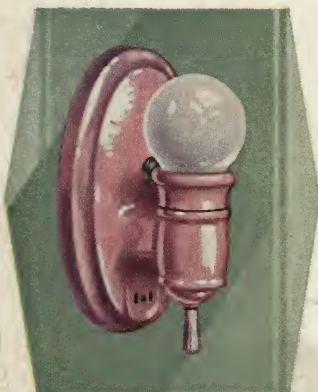

ORCHID
(P & S No. AL 2846-M)



POMPEIAN GREEN
(P & S No. AL 1475-B)



OLD ROSE
(P & S No. AL 872-H)

LAMPS AND GLASSWARE ARE NOT SUPPLIED AND ARE NOT INCLUDED IN THE TRADE NUMBER



POMPEIAN GREEN
(P & S No. AL 990-B)




IVORY
(P & S No. AL 923-E)

P&S

A L A B A X



PORCELAIN LIGHTING FIXTURES

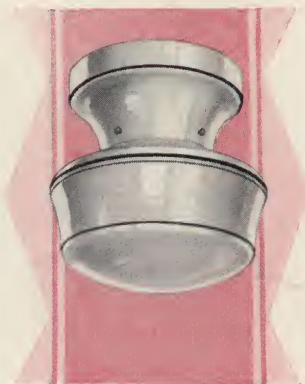

BLACK STRIPE
(P & S No. AL 2471-A4)



LIGHT GREEN
(P & S No. AL 1471-K)



BRONZE BROWN
(P & S No. AL 2371-L)



OLIVE GREEN
(P & S No. AL 2671-J)



BLUE STRIPE
(P & S No. AL 1200-A1)

LAMPS AND GLASSWARE ARE NOT SUPPLIED AND ARE NOT INCLUDED IN THE TRADE NUMBER



LIGHT BLUE
(P & S No. AL 949-G)



ROYAL BLUE
(P & S No. AL 849-F)

P & S INSTALLATIONS

These illustrations show a few attractive installations of P & S Alabax porcelain brackets and receptacles.



Manufactured by
PASS & SEYMOUR, INC.
 Solvay Station, Syracuse, N. Y.

New York Office:
 71-73 Murray St.

Chicago Office:
 730-32 W. Monroe St.

